


This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (publ) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


FRAME PLATE

*) Recommended free space for opening and closing to be applied on both sides

**) Free space can be reduced to this distance on one of the sides



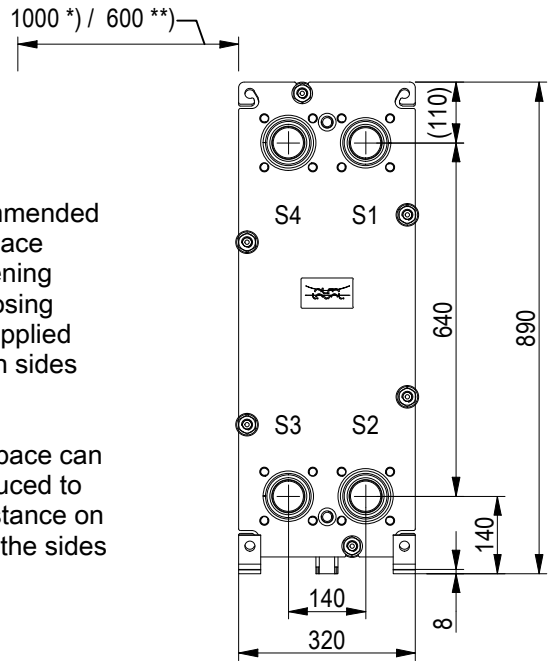


Space between pressure plate and supporting column should be kept free from fixed installations!

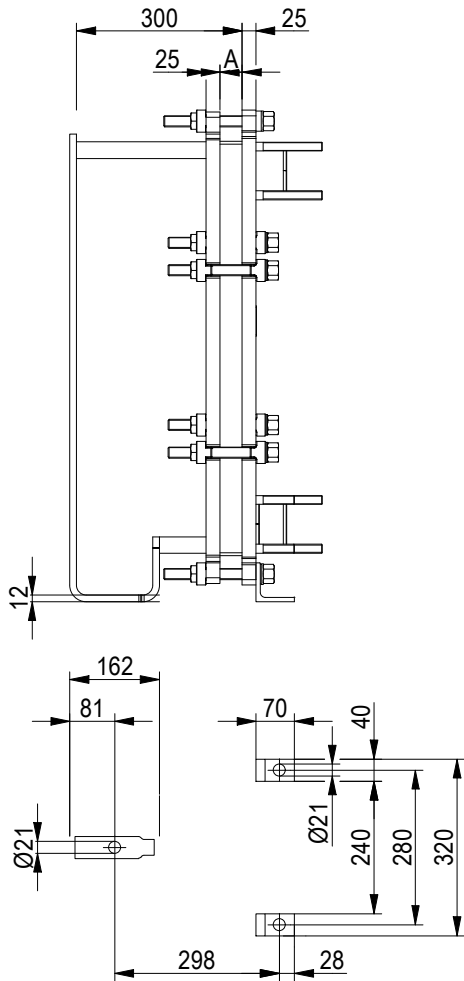


PRESSURE PLATE


(MOVABLE)

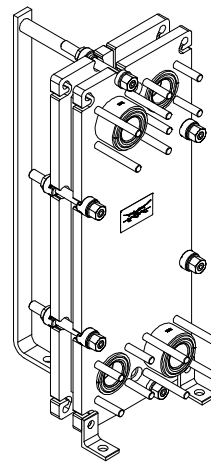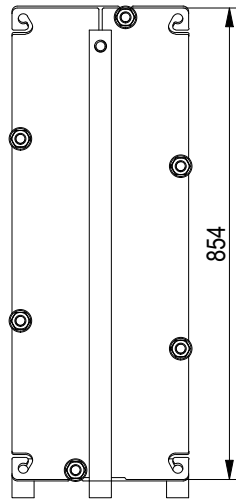


EN 1092-1 DN50 PN16
S1, S3

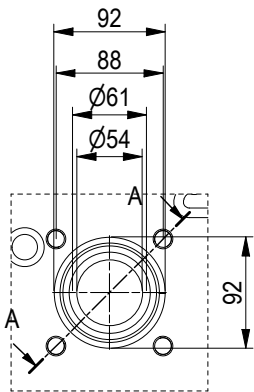


A-A:
NBRP / ALLOY 316



EN 1092-1 DN50 PN16
S2, S4

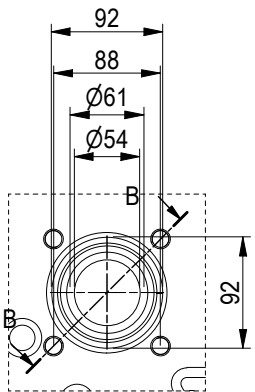

B-B:
NBRP / ALLOY 316

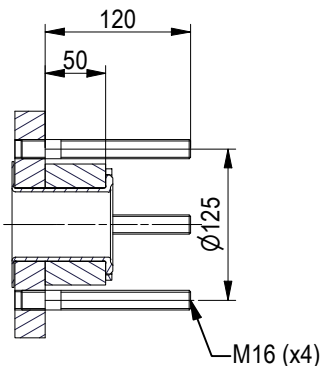

All dimensions in millimeters (mm)

NO. OF UNITS

1

ML
MH

ML
MH


APPROX. OUTER DIMENSIONS	
LENGTH	490 mm
WIDTH	330 mm
HEIGHT	880 mm
APPROX. WEIGHTS	
NET WEIGHT, EMPTY	130 kg
WEIGHT FULL OF WATER	138 kg
PLATE MATERIAL	ALLOY 316
PLATE THICKNESS	0.5 mm
GASKET	NBRP ClipGrip™

CHANNEL ARRANGEMENT 1*9 ML
/ 1*10 MH



www.alfalaval.com

DRAWING
GASKETED PLATE HEAT EXCHANGER
T6-PFG
PED Article 4.3



8240120948

Do not use this drawing for foundation bolting or piping layout

DATE 2/21/22
REVISION 0