

Alfa Laval Unique SSV Aseptic

Single seat valves

Introduction

The Alfa Laval Unique SSV Aseptic is a versatile, reliable pneumatic single seat valve with a single contact surface between the plug and the seat to minimize the risk of contamination.

Its compact, modular and hygienic design meets the highest process requirements in terms of hygiene and safety. Built on the well-proven Alfa Laval Unique SSV platform, it features a one-piece diaphragm that provides hermetic sealing to prevent intrusion of contaminants from the atmosphere, ensuring full protection against the effects of microorganisms during processing. The special diaphragm can also be used with the Unique SSV Standard, Tangential, Two Step, Manual and Tank Outlet.

Few moving parts ensure easy maintenance, high reliability and low total cost of ownership. A wide range of optional features enables customization to specific process requirements.

Application

This Unique SSV Aseptic is designed for uninterrupted production in sterile and aseptic applications across the dairy, food, beverage, brewery, biotechnology, pharmaceutical and many other industries.

Benefits

- Durable, aseptic valve design
- Superior cleanability – smooth inner valve body without crevices
- Extended seal life due to the defined seal compression
- Enhanced product safety due to the static seal leak detection
- Protection against bacterial contamination
- Easy to configure

Standard design

The Unique SSV Aseptic is available in a one- or two-body configuration, with easy-to-configure valve bodies, plugs, actuator and clamp rings. The valve can be configured for aseptic processing as a shutoff valve with two or three working ports or as a changeover valve with three to five ports.



To ensure flexibility, the valve seat that sits between the two bodies in the changeover version is provided for assembly. The valve seals are optimized for durability and long service life through a defined compression design. The actuator is connected to the valve body using a yoke, and all components are assembled with clamp rings.

The valve can be fitted with Alfa Laval ThinkTop V-series for sensing and control of the valve. See ThinkTop datasheets for further details.

Using the Alfa Laval Anytime configurator, it is easy to customize to meet virtually any process requirement.

Working principle

The Alfa Laval Unique SSV Aseptic is operated by means of compressed air from a remote location. The actuator smooths operation and protects process lines against pressure peaks. An integrated valve plug/diaphragm secures aseptic operation. The valve can be controlled using an Alfa Laval ThinkTop®.

Certificates



Authorized to carry
the 3A symbol

TECHNICAL DATA

Temperature

Temperature range:	14 °F to 284 °F (EPDM)
Max. sterilization temperature (<1 min):	302 °F/380 kPa (55 PSI)

Pressure


Pressure range:	0-116 PSI (0-8 bar)
Max. sterilization temperature (steam - short time):	302 °F/55 PSI (3.8 bar)
Air pressure:	72.5-101.5 PSI (500-700 kPa) (5-7 bar)



Note!

Vacuum is not recommended in aseptic applications.

Valve body combinations

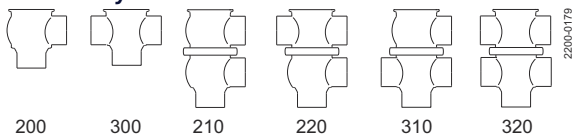

Actuator function

- Pneumatic downward movement, spring return (NO)
- Pneumatic upward movement, spring return (NC)
- Pneumatic upward and downward movement (A/A)

PHYSICAL DATA

Materials

Product wetted steel parts:	AISI 316L
Other steel parts:	AISI 304
Internal surface finish:	Ra 32 µin
Product wetted seal:	EPDM
Optional product wetted seals:	HNBR and FPM
Other seals:	NBR
Diaphragm:	PTFE (Product wetted side)/EPDM

Options

- Male parts or clamp liners in accordance with required standard
- Control and Indication: ThinkTop V-Series
- Product wetted seals in HNBR or FPM
- Low pressure actuator
- High product pressure actuator
- Maintainable actuator
- 2 step/3 position actuator (not for DN/OD 25/DN 25)
- External surface bright
- Tangential valve body



Note!

For further details, see instruction manual.

Other valves in the same basic design

- Shut-off valve
- Change-over valve
- Reverse acting valve
- Long stroke version
- Manual operated valve
- Small Single Seat Valve (SSSV)

Semi-Maintainable actuator comes with 5 year warranty.

Dimensions (inch)

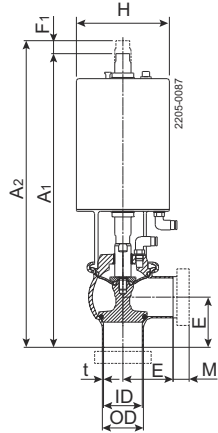


Figure 1. Shut-off valve

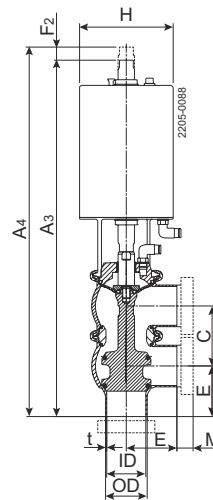


Figure 2. Change-over valve

Nominal size	DN/OD					
	1"	1.5"	2"	2.5"	3"	4"
A ₁	12.14	12.38	14.46	15.50	17.01	18.99
A ₂	12.57	12.81	15.06	16.09	17.8	19.74
A ₃	14.02	14.8	17.37	18.90	20.91	23.86
A ₄	14.34	15.13	17.88	19.41	21.54	24.49
C	1.88	2.39	2.91	3.4	3.89	4.87
OD	0.98	1.5	2.01	2.5	3.0	4
ID	0.86	1.37	1.88	2.37	2.87	3.84
t	0.05	0.06	0.06	0.06	0.06	0.08
E	1.97	1.95	2.40	3.19	3.39	4.69
F ₁	0.43	0.43	0.59	0.59	0.75	0.75
F ₂	0.31	0.35	0.51	0.51	0.63	0.63
H	3.35	3.35	4.52	4.52	6.07	6.07
M/ Clamp	0.50	0.50	0.50	0.50	0.50	0.63
Weight (lb)						
Shut-off valve	6.8	7.2	12.3	14.6	25.3	30.8
Change-over valve	8.6	9.3	15.8	19.1	31.2	40.5



Note!

Opening/closing time will be affected by the following:







- The air supply (air pressure)
- The length and dimensions of the air hoses
- Number of valves connected to the same air hose
- Use of single solenoid valve for serial connected air actuator functions
- Product pressure

Air Connections Compressed air:
R 1/8" (BSP), internal thread.

Air Consumption (In³ free air) for one stroke

Size	1"-1½"	2"-2½"	3"-4"
NO and NC	0.96 x air pressure [PSI]	2.17 x air pressure [PSI]	5.51 x air pressure
A/A	1.94 x air pressure [PSI]	4.82 x air pressure [PSI]	11.15 x air pressure [PSI]

Pressure drop/capacity diagrams

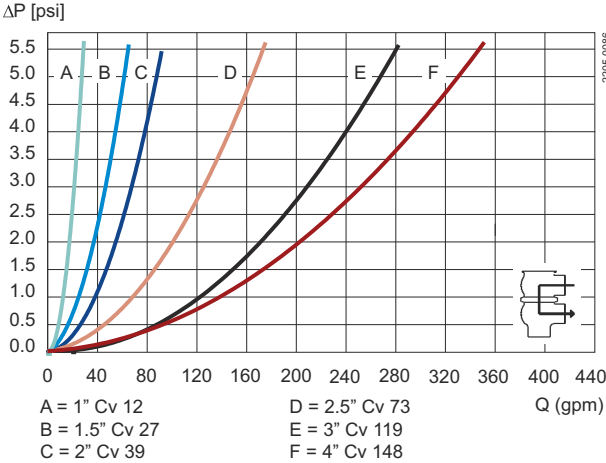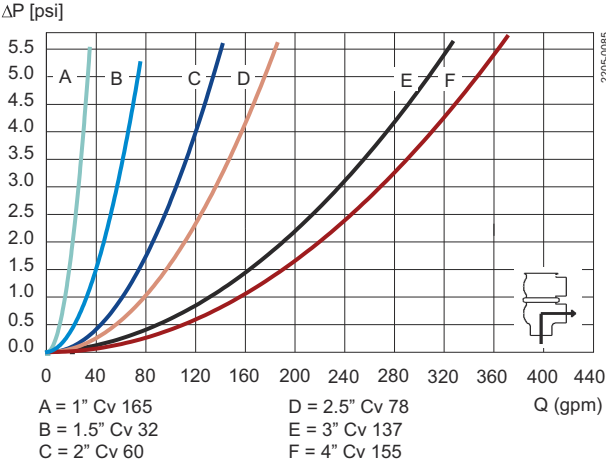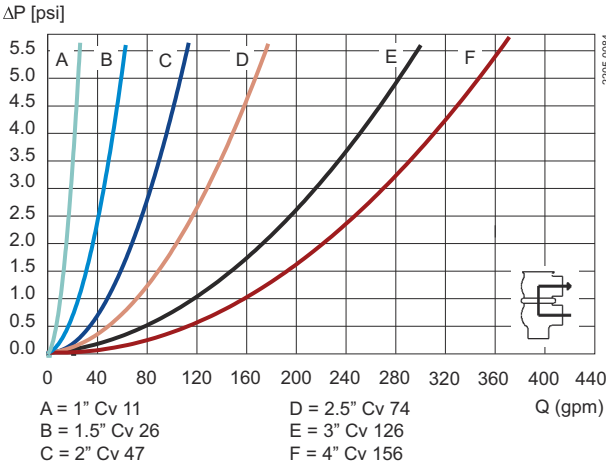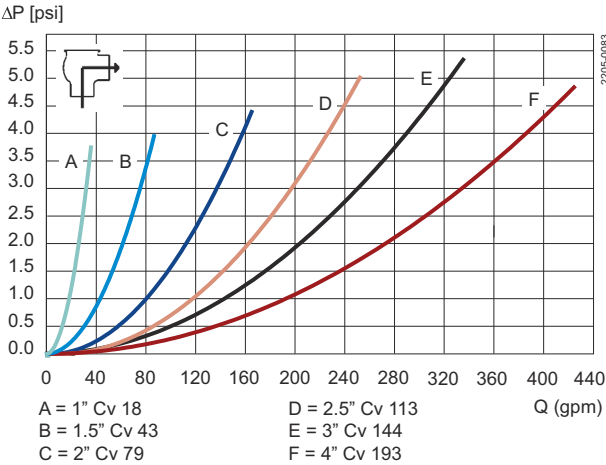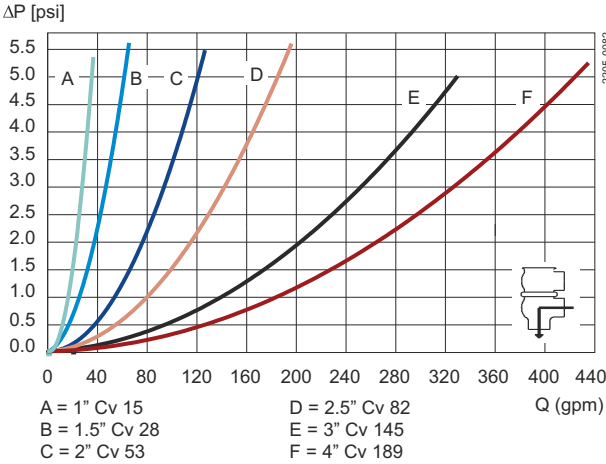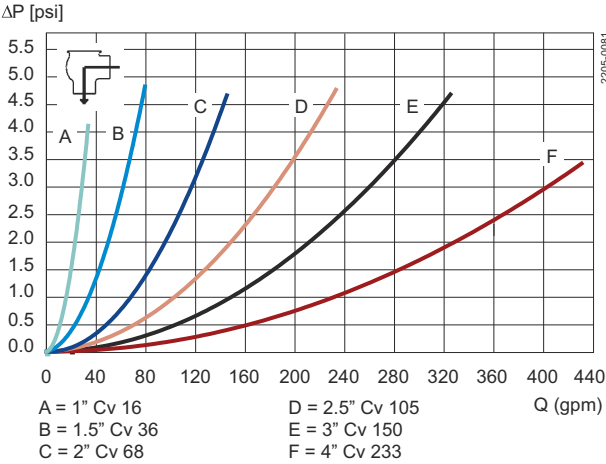

 **Note!**
For the diagrams the following applies:
Medium: Water (68 ° F/20 °C)
Measurement: In accordance with VDI 2173
Pressure drop can also be calculated in Anytime configurator.

Pressure drop can also be calculated with the following formula:

$Q = C_v \times \sqrt{\Delta p}$

Where

Q = Flow (gallon/minute).

Cv = gallon/minute at a pressure drop of 1 PSI (see table above).

Δ p = Pressure drop in psi over the valve.

Where

Q = Flow (gallon/minute).

Cv = gallon/minute at a pressure drop of 1 PSI (see table above).

Δ p = Pressure drop in psi over the valve.

$Q = K_v \times \sqrt{\Delta p}$

2.5" shut-off valve, where Cv = 128 (See table above).

$160 = 128 \times \sqrt{\Delta p}$

$\Delta p = \left(\frac{160}{128}\right)^2 = 1,6 \text{ psi}$

(This is approx. the same pressure drop by reading the y-axis above)

Pressure data for Unique Single Seat Valve Aseptic




Figure 3. 1




Figure 4. 2




Figure 5. 3




Figure 6. 4




Figure 7. 5




Figure 8. 6

Shut fully closed. Max. static pressure without leakage

Actuator / Valve body combination and direction of pressure	Air pressure (PSI)	Plug position	Valve size					
			DN 25 DN/OD 1"	DN 40 DN/OD 1½"	DN 50 DN/OD 2"	DN 65 DN/OD 2½"	DN 80 DN/OD 3"	DN 100 DN/OD 4"
Figure 3. 1		NO	116	87	116	64	109	78
Figure 4. 2	87	NO	116	110	116	81	104	70
Figure 5. 3	87	NC	116	116	116	6.8	109	73
Figure 6. 4		NC	116	91	104	61	93	61
Figure 7. 5	87	A/A	116	116	116	116	116	116
Figure 8. 6	87	A/A	116	116	116	116	116	116

Shut fully closed. Options with high pressure actuator - Max. static pressure without leakage

Actuator / Valve body combination and direction of pressure	Air pressure (PSI)	Plug position	Valve size					
			DN 25	DN 40	DN 50	DN 65	DN 80	DN 100
			DN/OD 1"	DN/OD 1½"	DN/OD 2"	DN/OD 2½"	DN/OD 3"	DN/OD 4"
Figure 3. 1		NO	116	116	116	116	-	-
Figure 4. 2	87	NO	116	116	116	116	-	-
Figure 5. 3	87	NC	116	116	116	116	116	59
Figure 6. 4		NC	116	116	116	116	116	102




Figure 9. 1




Figure 10. 2




Figure 11. 3




Figure 12. 4




Figure 13. 5




Figure 14. 6

Valve is closing. Approximately max. pressure in bar at which the valve can close by means of the spring or air pressure

Actuator / Valve body combination and direction of pressure	Air pressure (PSI)	Plug position	Valve size					
			DN 25	DN 40	DN 50	DN 65	DN 80	DN 100
			DN/OD 1"	DN/OD 1½"	DN/OD 2"	DN/OD 2½"	DN/OD 3"	DN/OD 4"
Figure 9. 1		NC	94	94	116	116	106	110
Figure 10. 2	87	NO	116	116	116	116	115	116

Seat fully closed - Standard valve. Approximately pressure in bar, at which the valve plug can change positions by the spring or air pressure

Actuator / Valve body combination and direction of pressure	Air pressure (PSI)	Plug position	Valve size					
			DN 25	DN 40	DN 50	DN 65	DN 80	DN 100
			DN/OD 1"	DN/OD 1½"	DN/OD 2"	DN/OD 2½"	DN/OD 3"	DN/OD 4"
Figure 11. 3		NO	116	116	116	116	116	116
Figure 12. 4	87	NO	116	116	116	116	116	116
Figure 13. 5	87	NC	116	116	116	116	116	116
Figure 14. 6		NC	116	116	116	83	116	78

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com