

Alfa Laval SaniMidget UltraPure

Rotary Spray Head

Introduction

The Alfa Laval SaniMidget UltraPure is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from 1 - 10 m³.

The Alfa Laval SaniMidget UltraPure minimizes the consumption of water, and cleaning media. Easy to customize to meet customer requirements, the SaniMidget UltraPure allows companies to spend less time cleaning and more time producing.

Alfa Laval UltraPure equipment is designed and configured to meet the high demands of the biotech and pharmaceutical industry. Special attention is given to documentation, material and surface finish, in compliance with current Good Manufacturing Practices (cGMP) and other guidance for this industry.

Application

The Alfa Laval SaniMidget UltraPure is engineered for the removal of residues from hygienic tanks across the biotech and pharmaceutical industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution

Standard design


Different choice of spray patterns suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structures such as agitator and baffles. The SaniMidget UltraPure is lubricated by the cleaning media.

Working principle


The flow of the cleaning media causes the head of the Alfa Laval SaniMidget UltraPure to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.




Spray Pattern



360°



270° up



180° down

Certificates

2.2 material certificate, Q-doc and ATEX.



TECHNICAL DATA

Lubricant:	Self-lubricating with the cleaning fluid
Wetting radius:	Max. 3 m
Impact cleaning radius:	Max. effective 1.4 m

Pressure

Working pressure:	1 - 3 bar
Recommended pressure:	2 bar

PHYSICAL DATA

Materials	AISI 316L (UNS S31603), PTFE ¹
-----------	---

¹ FDA compliance 21CFR§177

Clip parts:	316
-------------	-----

Standard Surface finish

exterior + Electro polished:	Ra 0.5 µm
internal + Electro polished:	Ra 0.5 µm

Temperature

Max. working temperature:	95 °C
Max. ambient temperature:	140 °C

Weight

clip-on:	0.30 kg
On pipe:	0.55/0.90 kg

Connections

- Weld-on: 1" ISO 2037, or DN25 DIN11850-R2, or 1" BPE US
- Clip-on: 1" ISO 2037, or DN25 DIN11850-R1 or R2, or 1" BPE US


Caution

Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Qualification Documentation


Documentation specification	
Q-doc	Equipment Documentation includes: <ul style="list-style-type: none">• EN 1935/2004 DoC• EN 10204 type 3.1 inspection Certificate and DoC• FDA DoC• GMP EC 2023/2006 DoC• EU 10/2011 DoC• ADI DoC• QC DoC
	ATEX approved machine for use in explosive atmospheres
	Category 1 for installation in zone 0/20 in accordance with Directive 2014/34/EU II 1G Ex h IIC 85°C ...175 °C Ga II 1D Ex h IIIC T85°C ...T140 °C Da
Q-doc + FAT-SAT	Qualification Documentation includes <ul style="list-style-type: none">• Q-doc• RS, Requirement Specification• DS, Design specification incl. Traceability Matrix• FAT, Factory acceptance Test incl. IQ and OQ• SAT, Site Acceptance Test protocol incl. IQ and OQ for End-User Execution

Flow Rate

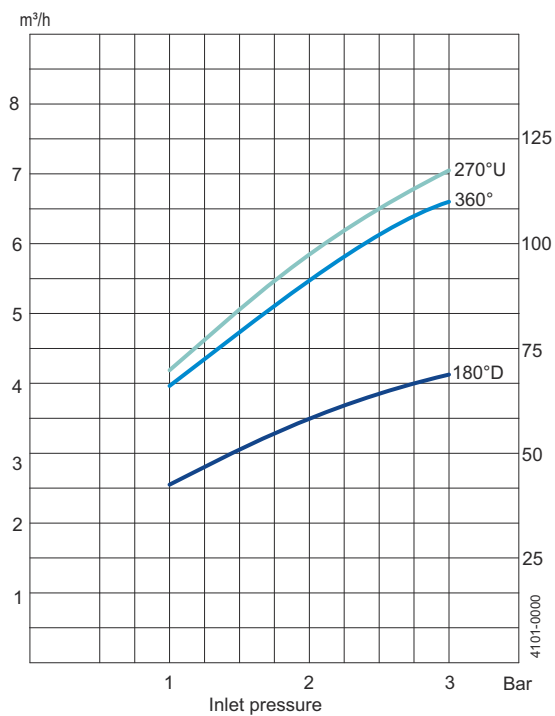

For clip-on models, the flow rate is increased by approx. 0.5 m³/h.


Cleaning Radius

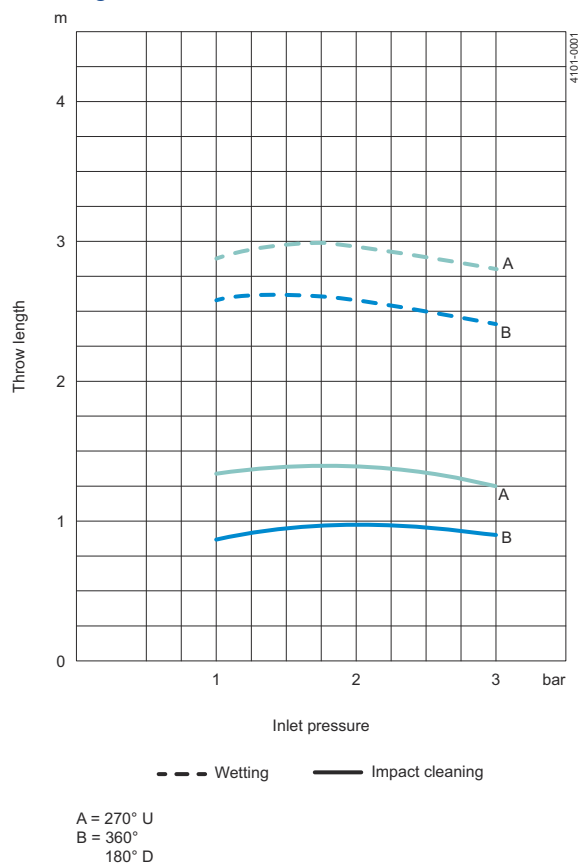

A = 270° U
B = 360°
180° D

Dimensions


Clip-on

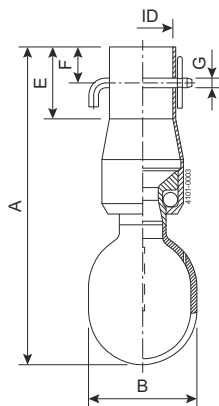

ID

ISO:	ø25.3 mm
BPE US:	ø25.7 mm
DIN Range 1:	ø28.3 mm
DIN Range 2:	ø29.3 mm

Weld-on

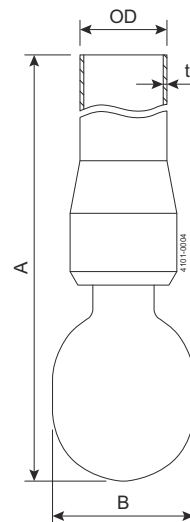

OD x t

ISO:	ø25 x 1.2 mm
BPE US:	ø25.4 x 1.65 mm
DIN Range 1:	ø28 x 1 mm
DIN Range 2:	ø29 x 1.5 mm

Type	A	B	E	F	G
Clip-on	133.5	ø45	30	15	ø4
Weld-on	120.5	ø45			

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200008109-1-EN-GB

© Alfa Laval Corporate AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com