LIFTING LUGS ARE DELIVERED UNASSEMBLED

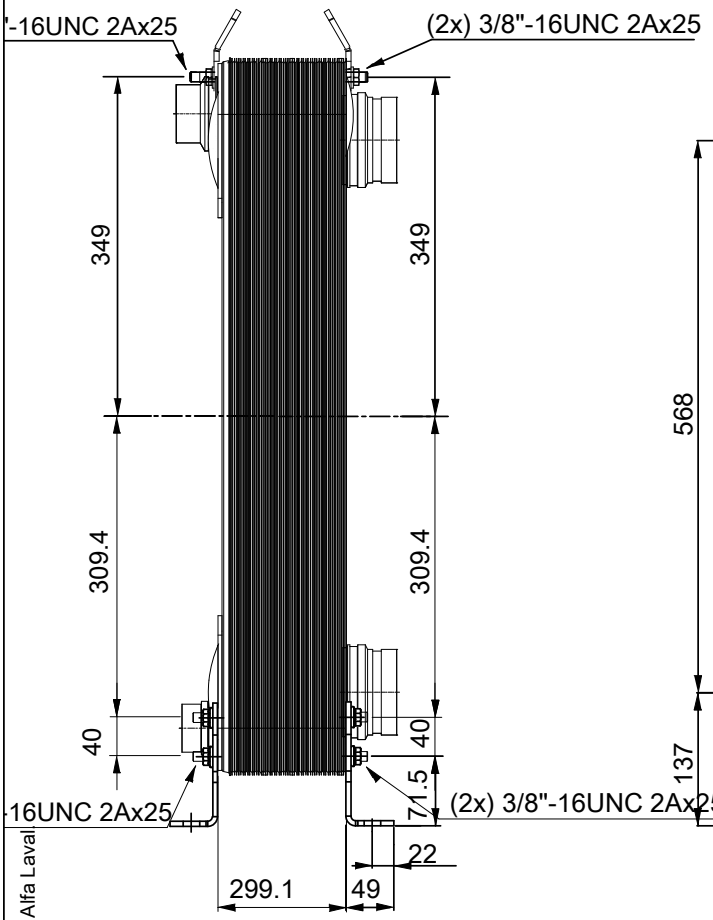

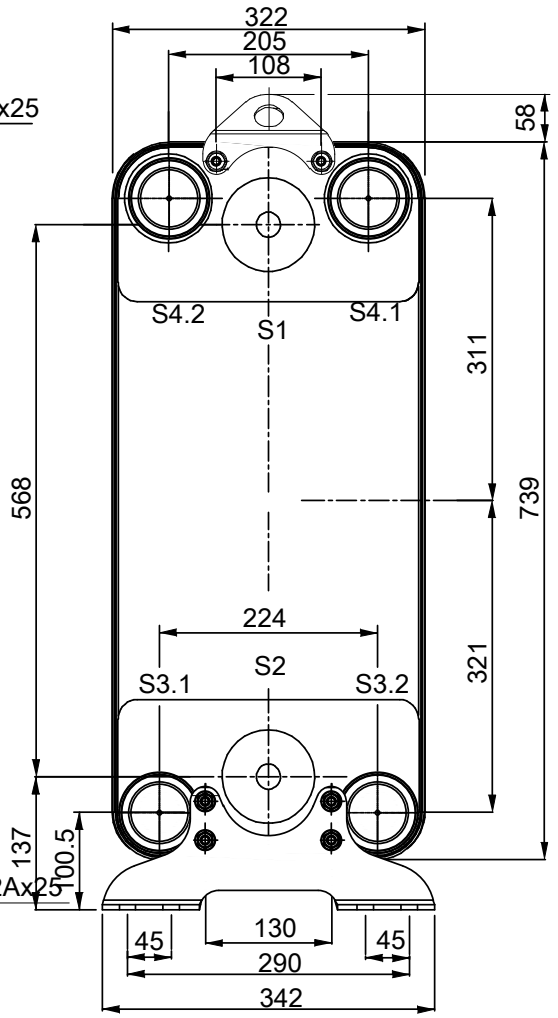

FEET ARE DELIVERED UNASSEMBLED

T1 T2 T3.1 T3.2 T4.1 T4.2 locations on back side
correspond to S1 S2 S3.1 S3.2 S4.1 S4.2 on front side

Diagonal flow type 6-ports.:
Circuit 1 :S3.1-S4.1
Circuit 2 :S3.2-S4.2

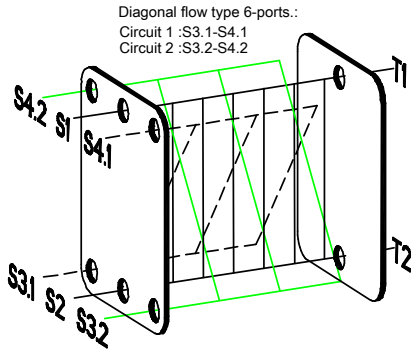

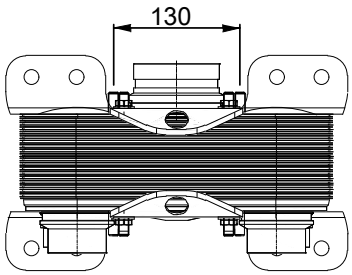

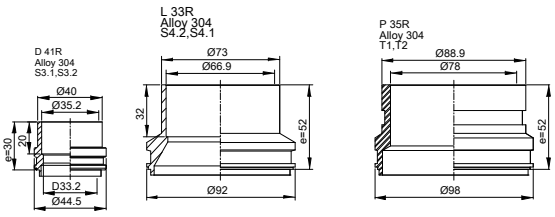

Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval

HEATING SURFACE	
NETWEIGHT	108.1 kg
OPERATING WEIGHT	kg
PLATE MATERIAL	ALLOY 316
PLATE GROUPING	1*27HR|1*27HR/1*55HB

ALL DIMENSIONS IN MILLIMETERS

SIDE	MEDIA	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
1		S4.2,T2		S3.2,T1				25.9 dm³
2		S4.1		S3.1				13.5/13.5 dm³

PRESSURE VESSEL APPROVAL UL/CRN

ACH-500DQ-110H-F (3287084579)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.

TOTAL LENGTH	401.6 mm
TOTAL WIDTH	322.0 mm
TOTAL HEIGHT	838.0 mm

1/15/2024
REV 0