

# Alfa Laval SaniJet 25

## Rotary jet heads

### Introduction

The Alfa Laval SaniJet 25 is a rotary jet head tank cleaning machine for hygienic environments. Built to clean tanks with capacities from 15 and 150 m<sup>3</sup> it combines pressure and flow to create high-impact cleaning jets that rotate in a repeatable and reliable 360-degree cleaning pattern. The SaniJet 25 minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, it allows companies to spend less time cleaning and more time producing.

### Application

The Alfa Laval SaniJet 25 is designed for the removal of the toughest residues from hygienic tanks across a broad range of industries, such as the dairy, brewery, food and beverage industries.

### Benefits

- 60% faster cleaning = more time for production
- Saves up to 70% of your cleaning cost
- Eliminates the need for confined space entry for manual tank cleaning
- High-impact cleaning in a 360° repeatable cleaning pattern
- Cleaning process can be validated using Alfa Laval Rotacheck

### Standard Design

The choice of nozzle diameters can optimize jet impact length and flow rate at the desired pressure. Alfa Laval offers a wide range of tank cleaning machines suitable for different duties and industries. An alternative that offers performance similar to the Alfa Laval SaniJet 25 is the Alfa Laval SaniJet 25 UltraPure for hygienic applications that require full traceability of product-wetted parts and smooth qualification and validation processes through the Alfa Laval Q-doc documentation package.

### Certificates

2.2 material certificate, Q-doc and ATEX.




## Working principle

The high-impact jet stream from the rotary jet head covers the entire surface 360° of the tank interior in a successively denser pattern. This achieves a powerful mechanical impact with a low volume of water and cleaning media.

The flow of the cleaning fluid makes the nozzles perform a geared rotation around the vertical and horizontal axes. In the first cycle, the nozzles lay out a course pattern on the tank surface. The subsequent cycles gradually make the pattern denser until at full cleaning pattern is reached.

Once the full cleaning pattern is reached, the machine will start over again and continue to perform the next full cleaning pattern.

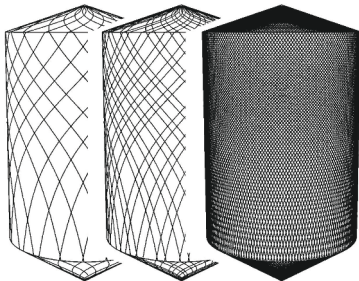

## TECHNICAL DATA

Lubricant:	Self-lubricating with the cleaning fluid
Standard Surface finish:	Ra 0.5 µm exterior / Ra 0.8 µm internal
Max throw length:	12.5 - 17 m
Impact throw length:	5.5 - 10 m

### Pressure

Working pressure:	3 - 8 bar
Recommended pressure:	5 - 6.5 bar

## PHYSICAL DATA

### Materials

316L (UNS S31603), Duplex steel (UNS N31803), Duplex steel (UNS S21800), PEEK\*, PFA\* and EPDM\*  
\* FDA compliance 21CFR§177

### Welding connection

1" ISO, 1" ANSI/Sch40, 1½" BPE US/SWG, 1½"Dairy, 1½"ANSI/Sch40 or NW40

### Temperature


Max. working temperature:	95 °C
Max. ambient temperature:	140 °C

Weight:	6.3 kg
---------	--------

## Caution


Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Flow Rate

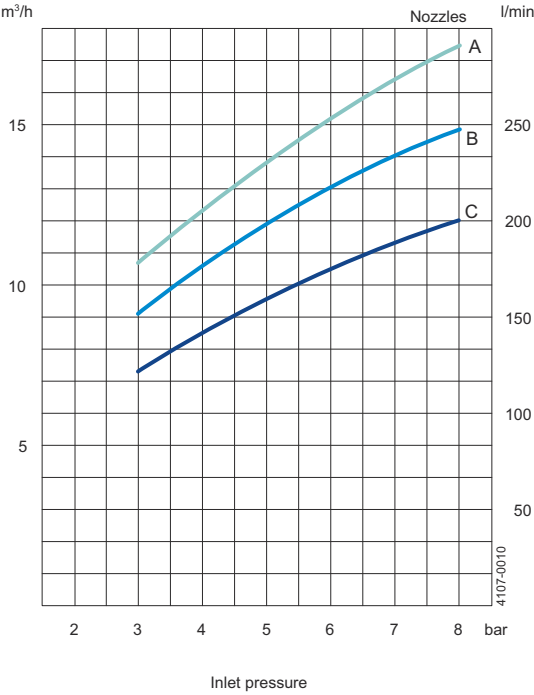

A = 4 x Ø6.2 mm  
B = 4 x Ø5.2 mm  
C = 4 x Ø4.2 mm


Impact Throw Length

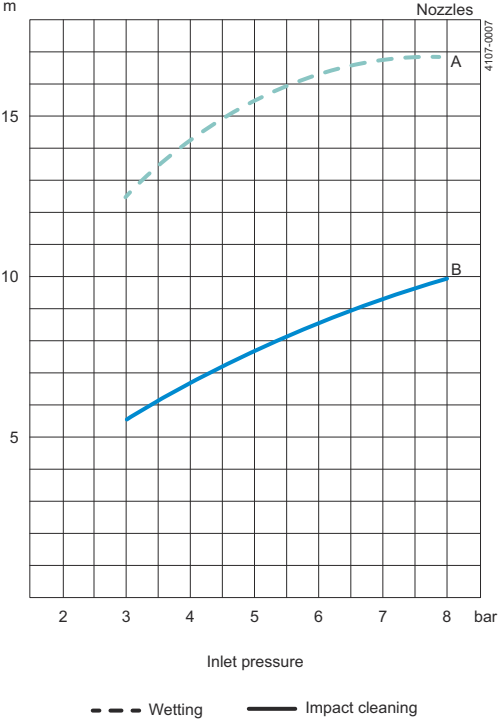

--- Wetting      — Impact cleaning  
A = Wetting      B = 4 x Ø4.2 mm  
                         4 x Ø5.2 mm  
                         4 x Ø6.2 mm


Cleaning Time, Complete Pattern

Min. RPM of machine body

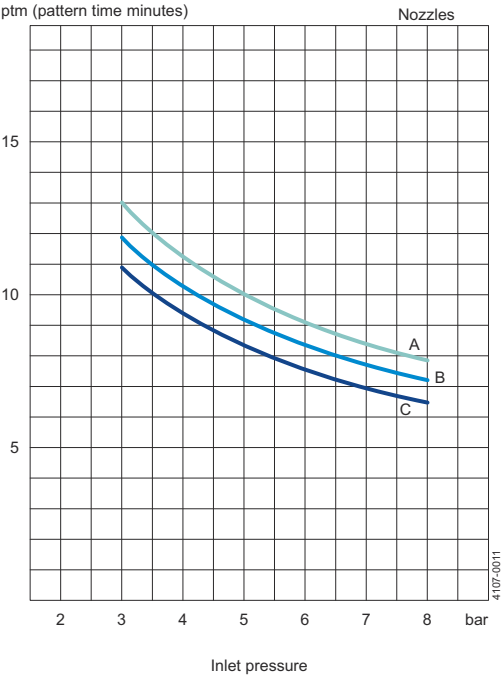

A = 4 x Ø6.2 mm  
B = 2 x Ø5.2 mm  
C = 2 x Ø4.2 mm

Dimensions (mm)

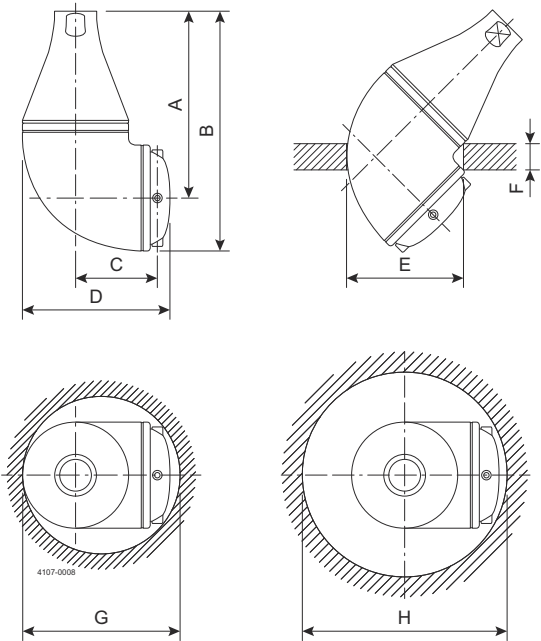

A	B	C	D	E	F	G	H
178	228.5	80	140	Ø110	max. 25	Ø150	Ø195

Qualification Documentation (Q-doc)

Documentation specification	
Q-doc	Equipment Documentation includes:
	<ul style="list-style-type: none"><li>• EN 1935/2004 DoC</li><li>• EN 10204 type 3.1 inspection Certificate and DoC</li><li>• FDA DoC</li><li>• GMP EC 2023/2006 DoC</li><li>• EU 10/2011 DoC</li><li>• ADI DoC</li><li>• QC DoC</li></ul>
ATEX	ATEX approved machine for use in explosive atmospheres
	Category 1 for installation in zone 0/20 in accordance with Directive 2014/34/EU
	II 1G Ex h IIC 85 °C ...175 °C Ga
	II 1D Ex h IIC T85 °C ...T140 °C Da

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at [www.alfalaval.com](http://www.alfalaval.com)