

Alfa Laval MultiMidget

Rotary Spray Head

Introduction

The Alfa Laval MultiMidget is a rotary spray head tank cleaning machine for hygienic environments. Designed to clean tanks from 1-10 m³.

The Alfa Laval MultiMidget minimizes the consumption of water and cleaning media. Easy to customize to meet customer requirements, the MultiMidget allows companies to spend less time cleaning and more time producing.

Application

The Alfa Laval MultiMidget is designed for the removal of residues from hygienic tanks across the dairy, brewery, distillery, beverage, food, IBC (intermediate bulk container), personal care and many other industries.

Benefits

- 40% faster cleaning = more time for production
- Saves up to 40% of your cleaning cost
- Dynamic cleaning performance and 360° full wetting
- Easy to retrofit traditional spray balls to a more economical solution
- Can be installed at any angle


Standard design

Different choice of spray pattern suitable for various applications and tank designs, ranging from simple tanks to more complex tanks with structure such as agitator and baffles. The MultiMidget is lubricated by the cleaning media.


Working principle

The flow of the cleaning media causes the head of the Alfa Laval MultiMidget to rotate, and the fan-shaped jets layout a swirling pattern throughout the tank or reactor. This generates the wetting/impact needed for the efficient removal of the residual product; the cascading flow covers all internal surfaces of the vessel.


Spray Pattern



360°



270° up



180° down



Certificates

2.1 material certificate.



TECHNICAL DATA

Lubricant:	Self-lubricating with the cleaning fluid
Wetting radius:	Max. 3 m
Impact cleaning radius:	Max. effective 1.4 m

Pressure

Working pressure:	1 - 3 bar
Recommended pressure:	2 bar

PHYSICAL DATA

Materials

Inlet connections/Balls:	316 (UNS S31600)
Bearing race parts:	Duplex steel (UNS S31803)
Head:	316 (UNS S31603)
Standard Surface finish:	Ra 0.8 µm exterior/ Ra 0.8 µm internal

Temperature

Max. working temperature:	95 °C
Max. ambient temperature:	140 °C

Weight

Thread:	0.50 kg
On pipe:	0.90 kg


Connections

- Thread: 1/2" or 3/4" Rp (BSP) or NPT
- Weld-on: 1" ISO 2037 or DN25 DIN11850-R2
- Clip-on: 1" ISO 2037

Caution


Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Flow Rate

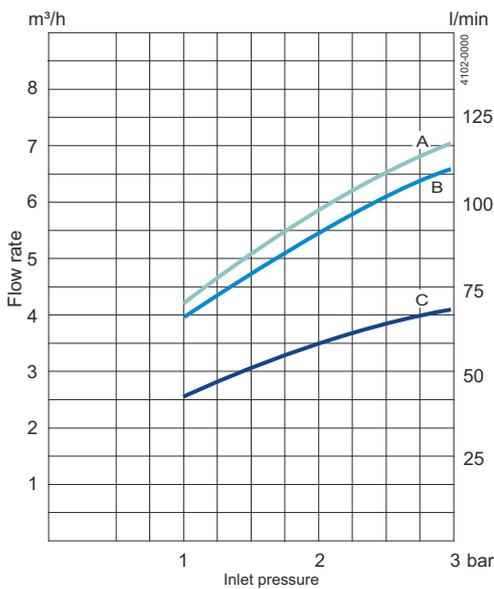

A = 270° U C = 180° D
 B = 360°

Cleaning Radius

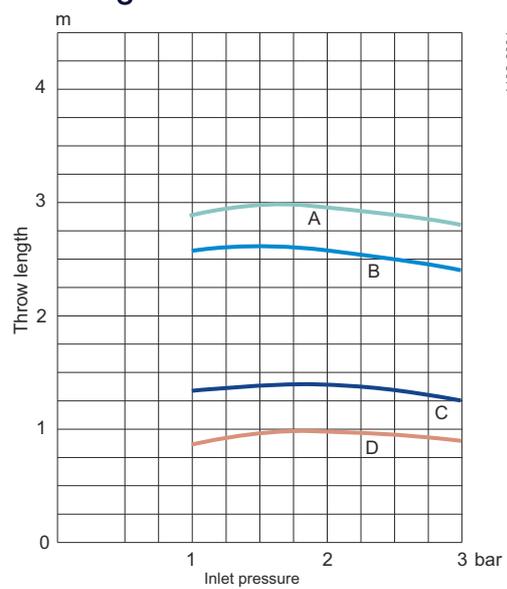

A = 270° U C = 270° U
 B = 360° D = 360°
 180° D 180° D

For clip-on models, the flow rate is increased by approx. 0.5 m³/h

Dimensions (mm)

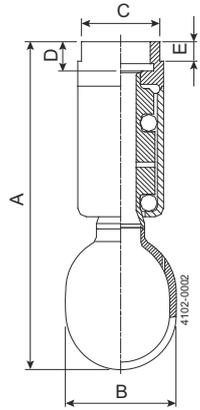


Figure 1. Thread

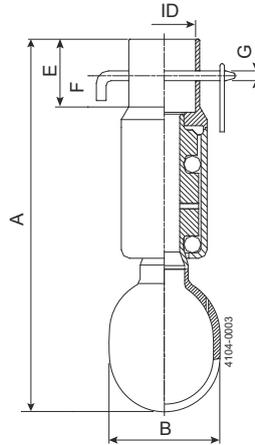


Figure 2. Clip-on

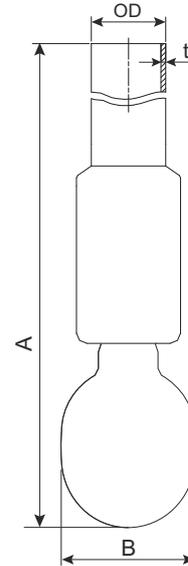


Figure 3. Weld-on

TH
 1/2" Rp (BSP)
 3/4" Rp (BSP)
 1/2" NPT
 3/4" NPT

ID
 ISO : Ø25.3 mm

OD x t
Welded on pipe
 ISO: Ø25 x 1.2 mm
 DIN Range 2: Ø29 x 1.5 mm

Type	A	B	C	D	E	F	G
Thread	137(BSP), 150(NPT)	Ø45	32	12(BSP) 25(NPT)	9(BSP) 22.5(NPT)		
Clip-on	155	Ø45			30	15	Ø4.2
Weld-on	500	Ø45					

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com