


This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (publ) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


OPID 2204 es

4940062912


PRESSURE PLATE
(MOVABLE)

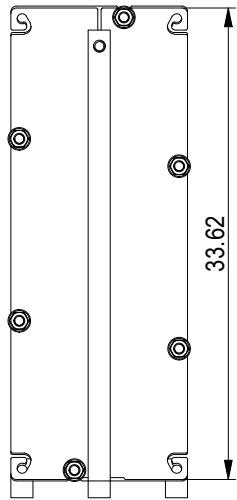


Space between pressure plate and supporting column should be kept free from fixed installations!

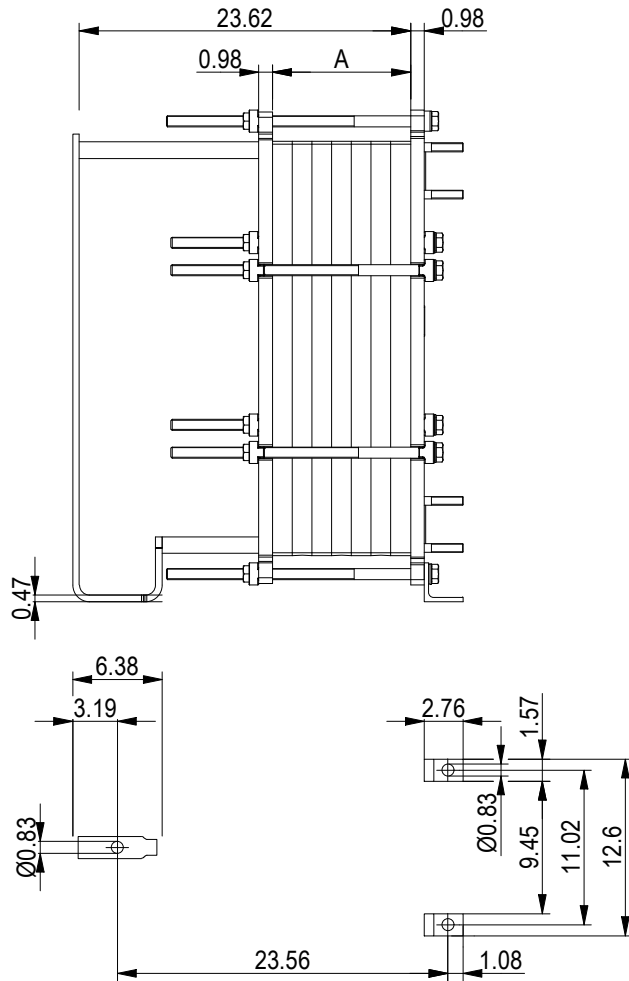


ASME B16.5 Class 150 NPS 2
S1, S2, S3, S4

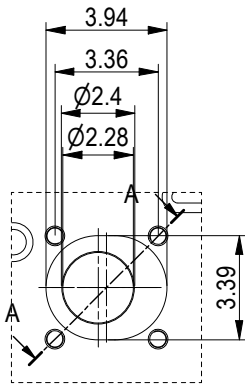

A-A:
ALLOY 316





FRAME PLATE

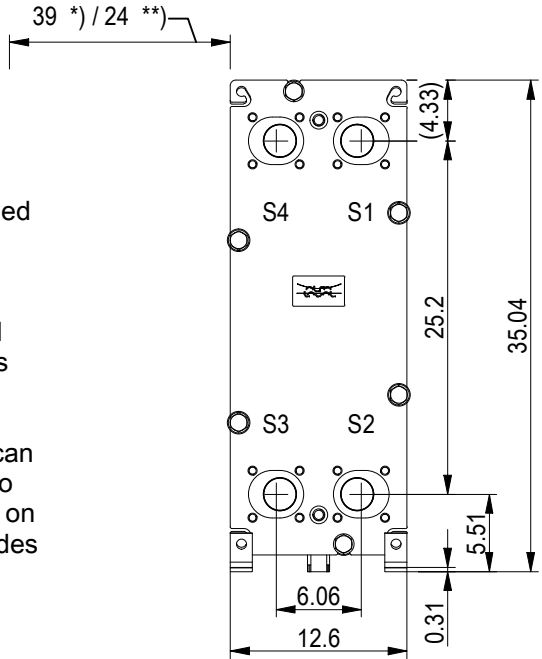

*)
Recommended
free space
for opening
and closing
to be applied
on both sides

**)
Free space can
be reduced to
this distance on
one of the sides


All dimensions in inches

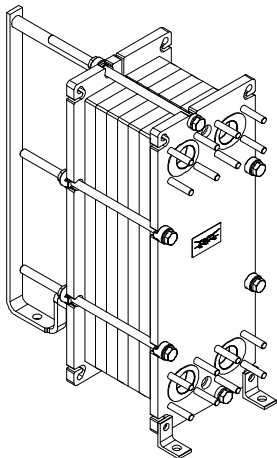

PROTECTION SHEET



PRESSURE PLATE



FRAME PLATE

TIGHTENING BOLTS
4 x M20, L = 18.9 in
2 x M20, L = 18.9 in

APPROX. OUTER DIMENSIONS
LENGTH 31.5 in
WIDTH 13.0 in
HEIGHT 34.6 in
APPROX. WEIGHTS
NET WEIGHT, EMPTY 430 lb
WEIGHT FULL OF WATER 483 lb
PLATE MATERIAL ALLOY 316
PLATE THICKNESS 0.5 mm
GASKET NBRP ClipGrip™
AREA OF HEAT SURFACE 91.8 ft²

NO. OF UNITS
CHANNEL
MH
ML

1


10.0 GPM
9.9 GPM



www.alfalaval.com

DRAWING
GASKETED PLATE HEAT EXCHANGER
T6-PFG
ASME
Code Section VIII Div.1

MAWP 150 psi at 266.0 °F
MDMT -18.0 °F at 150 psi
Designed, constructed and stamped in accordance with 2021 ASME.



8240152967
T6-PFG, 60 plates,

Do not use this drawing for foundation bolting or piping layout
or planning of lifting and handling of the equipment.

DATE 6/13/23
REVISION 0