




FRAME PLATE

*) Recommended free space for opening and closing to be applied on both sides




**) Free space can be reduced to this distance on one of the sides

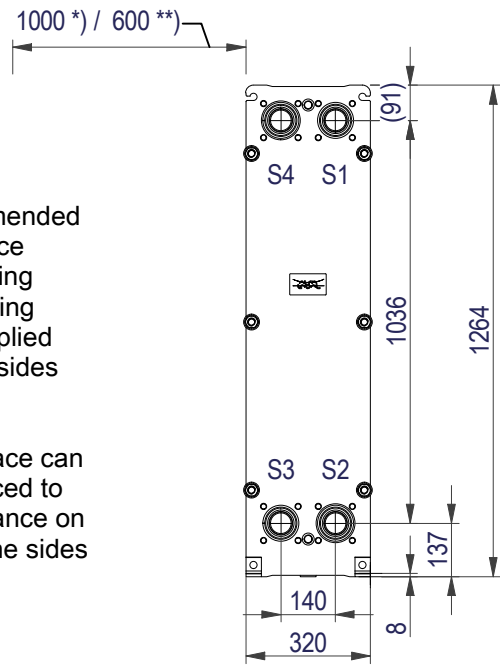


Space between pressure plate and supporting column should be kept free from fixed installations!

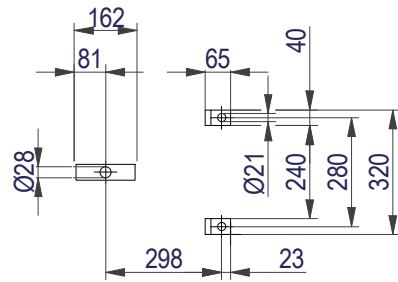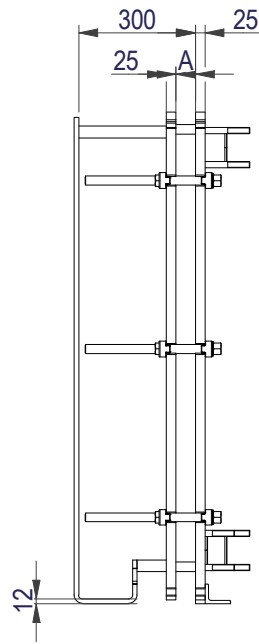


PRESSURE PLATE (MOVABLE)

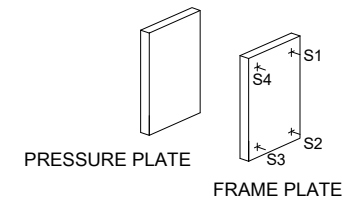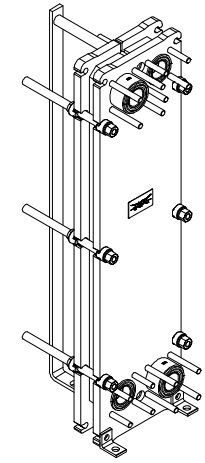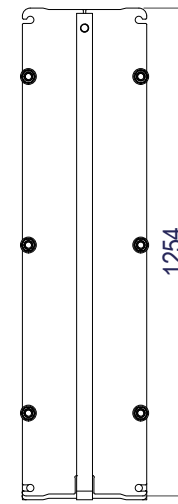


EN 1092-1 DN50 PN16
S1, S3

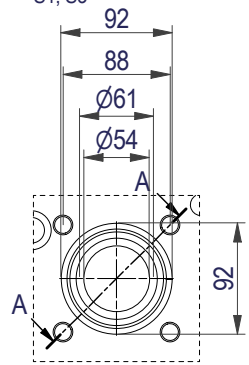


A-A:
NBRP / ALLOY 254



EN 1092-1 DN50 PN16
S2, S4

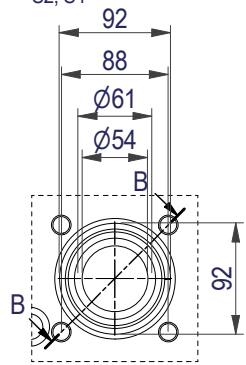

B-B:
NBRP / ALLOY 254

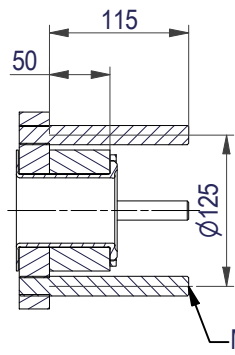

All dimensions in millimeters (mm)

NO. OF UNITS

1

APPROX. OUTER DIMENSIONS	
LENGTH	480 mm
WIDTH	330 mm
HEIGHT	1270 mm
APPROX. WEIGHTS	
NET WEIGHT, EMPTY	194 kg
WEIGHT FULL OF WATER	205 kg
PLATE MATERIAL	ALLOY 316
PLATE THICKNESS	0.5 mm
GASKET	NBRP Clip-on

CHANNEL ARRANGEMENT 1*12 H / 1*12 H




www.alfalaval.com

DRAWING
GASKETED PLATE HEAT EXCHANGER

TL6-BFM

PED Article 4.3



8240123110

Do not use this drawing for foundation bolting or piping layout

DATE 2/24/22
REVISION 0