
EN 1092-1 DN50 PN16


Ø54

S1, S3

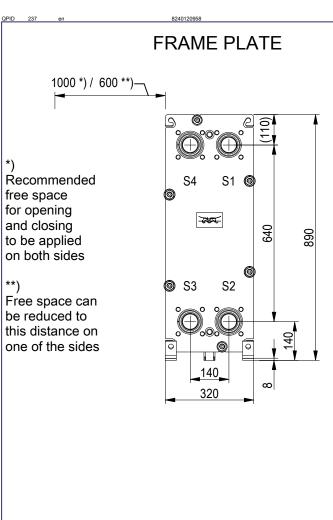


NBRP / ALLOY 316


Space between pressure plate and supporting column should be kept free from fixed installations!

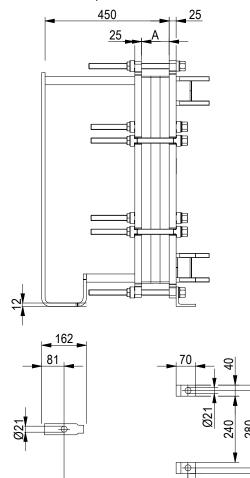




(MOVABLE)

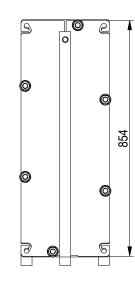

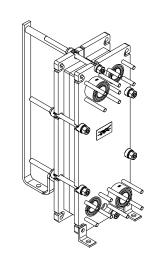



S2, S4 NBRP / ALLOY 316 -M16 (x4) -M16 (x4) NO. OF UNITS

ML

MH

APPROX. OUTER DIMENSIONS LENGTH 640 mm

WIDTH 330 mm HEIGHT 880 mm

APPROX. WEIGHTS

NET WEIGHT, EMPTY 158 kg WEIGHT FULL OF WATER 179 kg ALLOY 316 PLATE MATERIAL PLATE THICKNESS 0.5 mm

NBRP ClipGrip™ **GASKET**

CHANNEL ARRANGEMENT 1*24 ML / 1*25 MH



DRAWING GASKETED PLATE HEAT EXCHANGER

ML

МН

EN 1092-1 DN50 PN16

PED Article 4.3

8240120958

Do not use this drawing for foundation bolting or piping layout

DATE REVISION 2/21/22