


This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (publ) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


FRAME PLATE

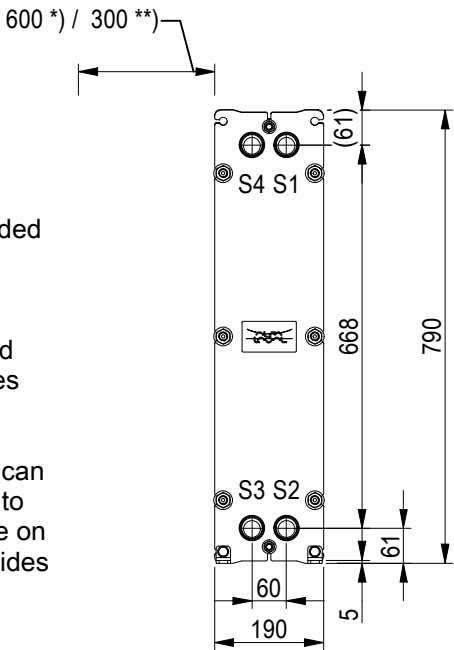

*) Recommended free space for opening and closing to be applied on both sides




**) Free space can be reduced to this distance on one of the sides

Space between pressure plate and supporting column should be kept free from fixed installations!

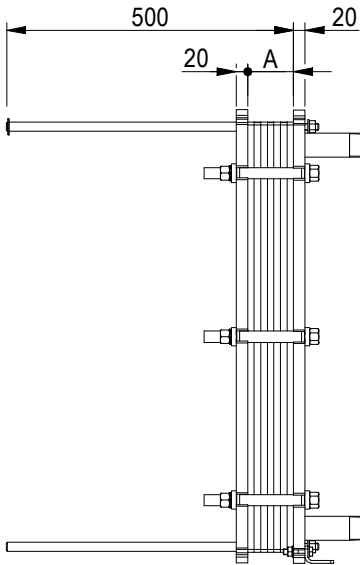

PRESSURE PLATE

(MOVABLE)

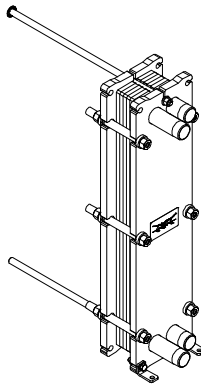
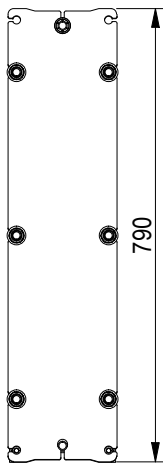


ISO 7 - R 1 1/4, ALLOY 316, 80 mm
S1, S2


A-A:

ISO 7 - R 1 1/4, ALLOY 316, 120 mm
S3, S4


C-C:



ISO 7 - R 1 1/4



C-C:



ISO 7 - R 1 1/4

All dimensions in millimeters (mm)

NO. OF UNITS

1


APPROX. OUTER DIMENSIONS	
LENGTH	510 mm
WIDTH	200 mm
HEIGHT	800 mm
APPROX. WEIGHTS	
NET WEIGHT, EMPTY	51.3 kg
WEIGHT FULL OF WATER	58.7 kg
PLATE MATERIAL	ALLOY 316
PLATE THICKNESS	0.5 mm
GASKET	NBRP Clip-on

CHANNEL ARRANGEMENT 1*29 H
/ 1*30 H



www.alfalaval.com

DRAWING
GASKETED PLATE HEAT EXCHANGER
TL3-BFG
PED Article 4.3



8240123445

Do not use this drawing for foundation bolting or piping layout

DATE 2/25/22
REVISION 0