


This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (publ) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


OPID 2204 es

4940062907


PRESSURE PLATE (MOVABLE)

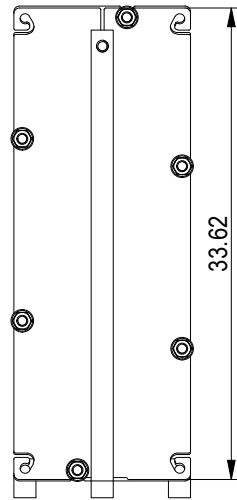

Space between pressure plate and supporting column should be kept free from fixed installations!

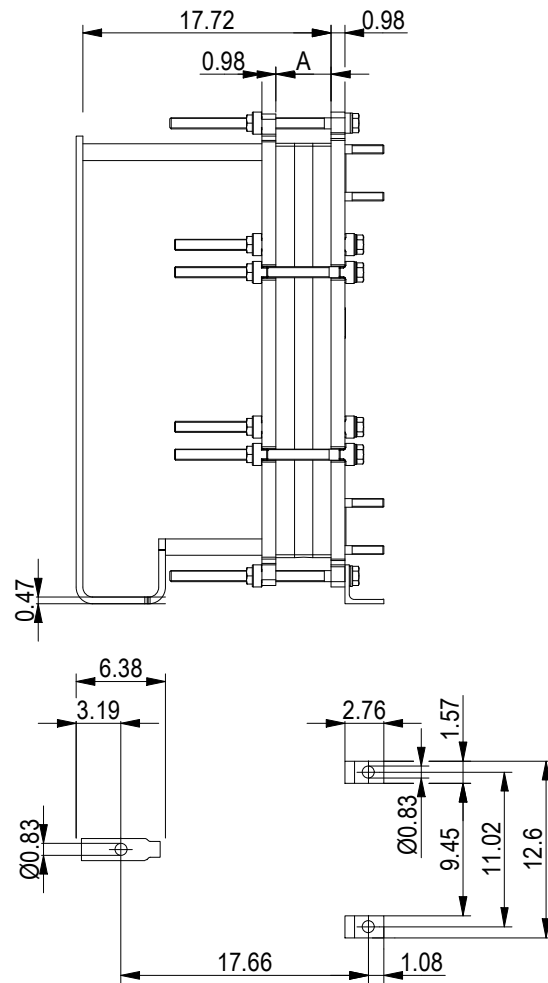



FRAME PLATE

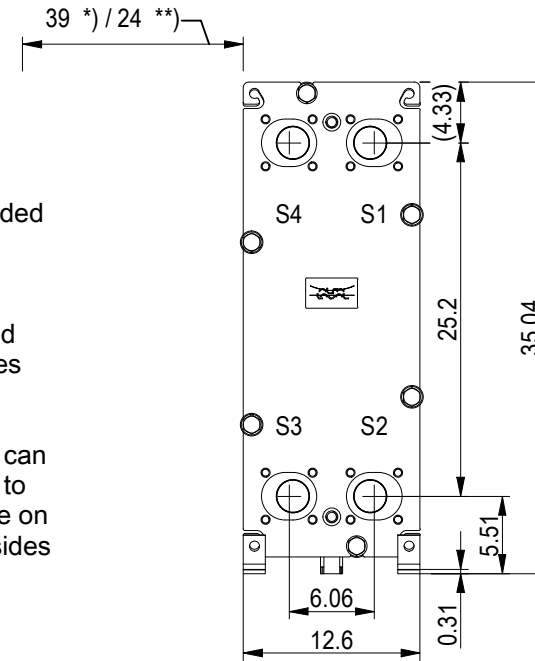


*) Recommended free space for opening and closing to be applied on both sides

**) Free space can be reduced to this distance on one of the sides


All dimensions in inches

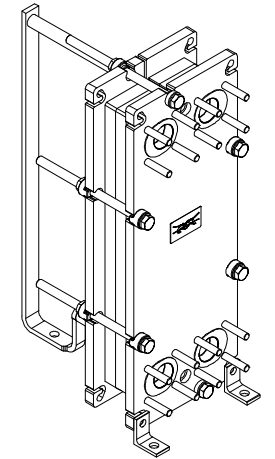

PROTECTION SHEET




PRESSURE PLATE




FRAME PLATE

ASME B16.5 Class 150 NPS 2
S1, S2, S3, S4

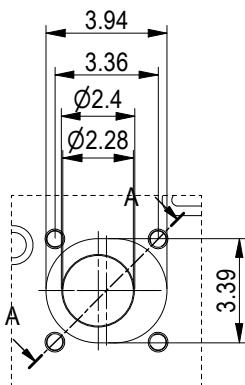

A-A:
ALLOY 316



NO. OF UNITS
CHANNEL
MH
ML

1

10.0 GPM
9.9 GPM

TIGHTENING BOLTS
4 x M20, L = 13.0 in
2 x M20, L = 13.0 in

APPROX. OUTER DIMENSIONS
LENGTH 25.6 in
WIDTH 13.0 in
HEIGHT 34.6 in
APPROX. WEIGHTS
NET WEIGHT, EMPTY 370 lb
WEIGHT FULL OF WATER 402 lb
PLATE MATERIAL ALLOY 316
PLATE THICKNESS 0.5 mm
GASKET NBRP ClipGrip™
AREA OF HEAT SURFACE 52.2 ft²




www.alfalaval.com

DRAWING
GASKETED PLATE HEAT EXCHANGER

T6-PFG

ASME
Code Section VIII Div.1

MAWP 150 psi at 266.0 °F
MDMT -18.0 °F at 150 psi
Designed, constructed and stamped in accordance with 2021 ASME.



8240152963
T6-PFG, 35 plates,

Do not use this drawing for foundation bolting or piping layout
or planning of lifting and handling of the equipment.

DATE 6/13/23
REVISION 0