


This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval (publ) or any of its affiliates (Alfa Laval). No part of this document may be copied, reproduced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

## FRAME PLATE


\*) Recommended free space for opening and closing to be applied on both sides

\*\*) Free space can be reduced to this distance on one of the sides

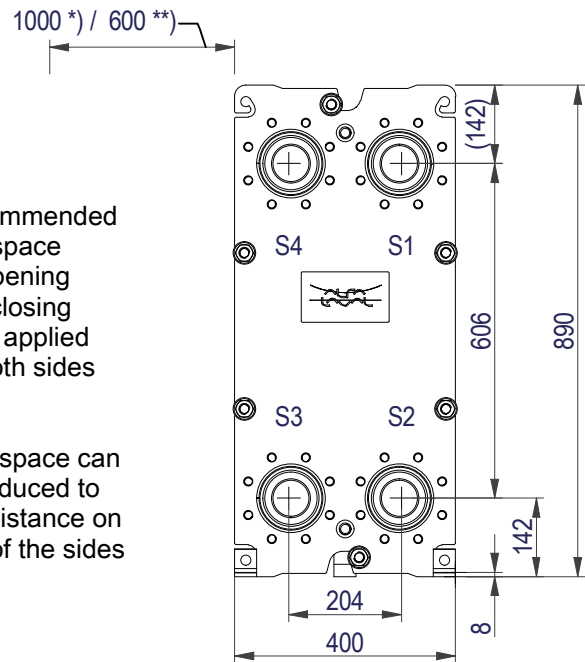


EN 1092-1 DN80 PN10  
S1, S2, S3, S4

A-A:  
NBRP / ALLOY 316

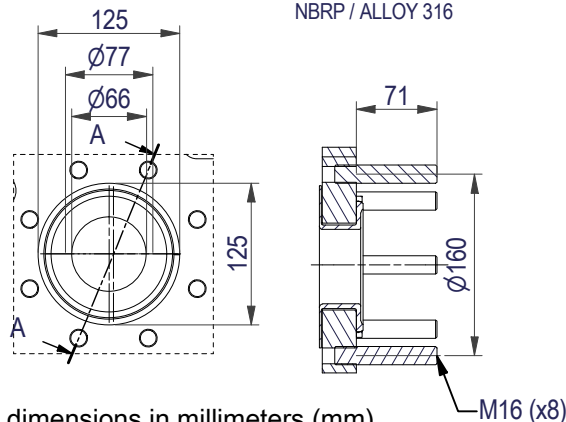




All dimensions in millimeters (mm)

Space between pressure plate and supporting column should be kept free from fixed installations!

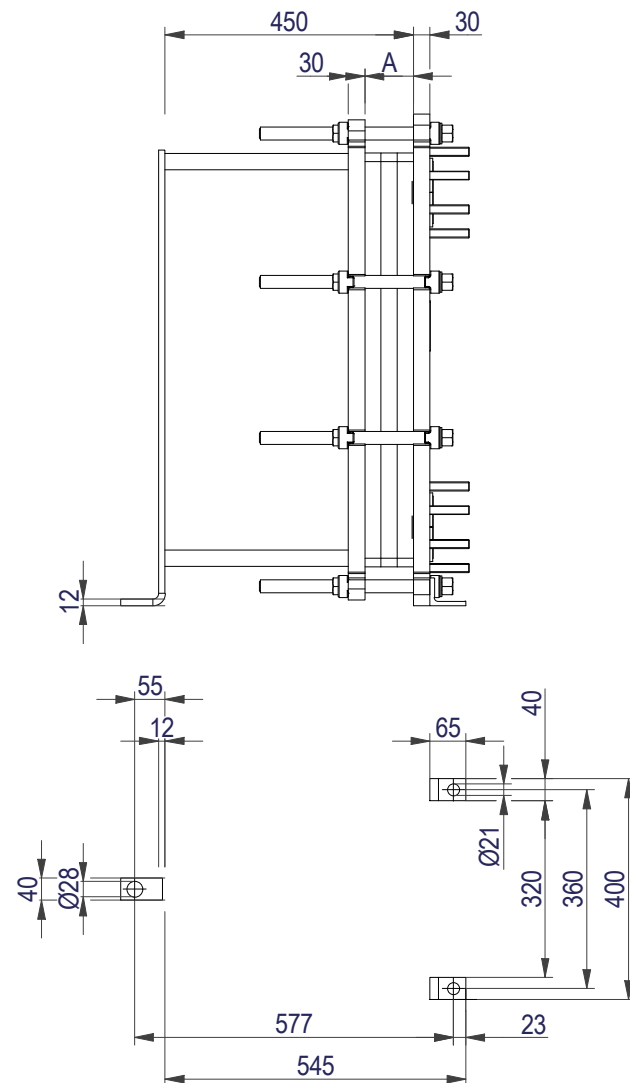

## PRESSURE PLATE

(MOVABLE)

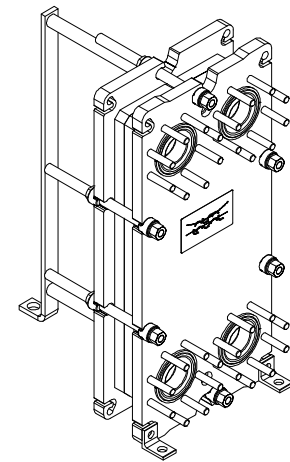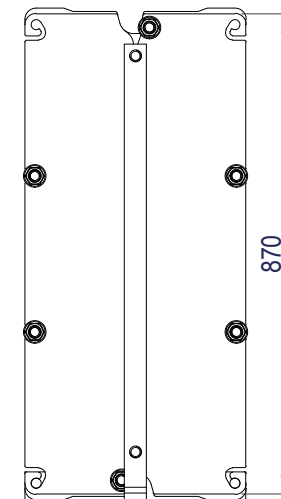

### APPROX. OUTER DIMENSIONS

|        |        |
|--------|--------|
| LENGTH | 570 mm |
| WIDTH  | 410 mm |
| HEIGHT | 900 mm |

### APPROX. WEIGHTS

|                      |                |
|----------------------|----------------|
| NET WEIGHT, EMPTY    | 207 kg         |
| WEIGHT FULL OF WATER | 224 kg         |
| PLATE MATERIAL       | ALLOY 316      |
| PLATE THICKNESS      | 0.5 mm         |
| GASKET               | NBRP ClipGrip™ |

CHANNEL ARRANGEMENT 1\*20 H  
/ 1\*19 H

NO. OF UNITS

1




www.alfalaval.com

DRAWING  
GASKETED PLATE HEAT EXCHANGER

# T8-BFM

PED Article 4.3



8240118346

Do not use this drawing for foundation bolting or piping layout

DATE 2/16/22  
REVISION 0