
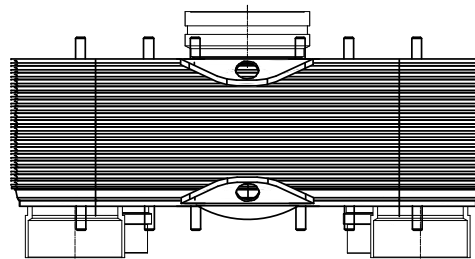
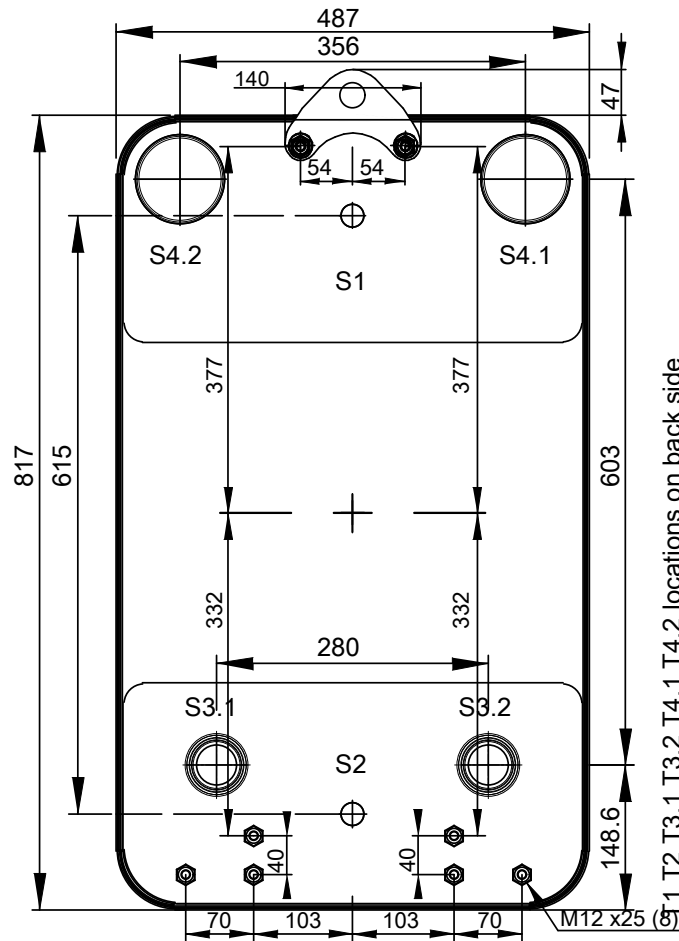


Parallel flow type 6-ports.:  
 Circuit 1 : S3.1-S4.2  
 Circuit 2 : S3.2-S4.1

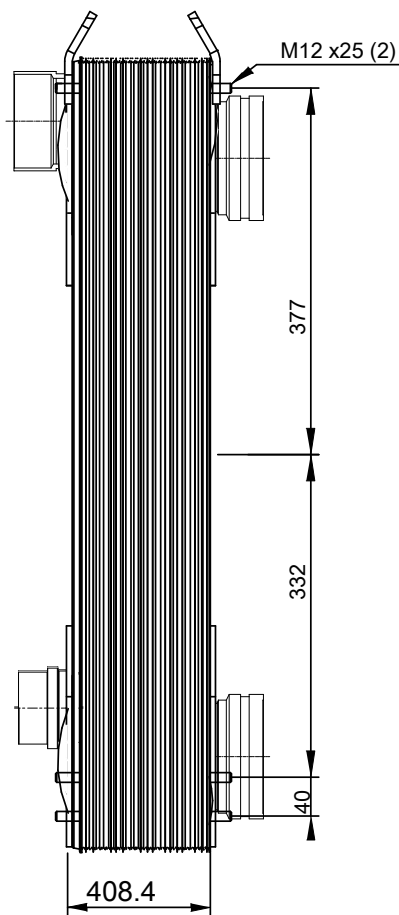

1 T2 T3.1 T3.2 T4.1 T4.2 locations on back side  
correspond to S1 S2 S3.1 S3.2 S4.1 S4.2 on front side

| SIDE | MEDIA | INLET     | TEMP. | OUTLET    | TEMP. | FLOW RATE | PRESSURE DROP | LIQUID VOL.               |
|------|-------|-----------|-------|-----------|-------|-----------|---------------|---------------------------|
| 1    |       | T1        |       | T2        |       |           |               | 59.9 dm <sup>3</sup>      |
| 2    |       | S3.1 S3.2 |       | S4.2 S4.1 |       |           |               | 24.4/24.4 dm <sup>3</sup> |

81 ALL DIMENSIONS IN MILLIMETERS

|                  |           |
|------------------|-----------|
| HEATING SURFACE  |           |
| NETWEIGHT        | 254.1 kg  |
| OPERATING WEIGHT | kg        |
| PLATE MATERIAL   | ALLOY 316 |
| PLATE GROUPING   | 1*40AHR1  |

---

PED/UK

AC1000DQ-162AH-F (3287168176)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

|              |          |
|--------------|----------|
| TOTAL LENGTH | 509.8 mm |
| TOTAL WIDTH  | 487.0 mm |
| TOTAL HEIGHT | 864.0 mm |

COMPANY / REF.



4/16/2024  
REV 0