




LIFTING LUGS ARE DELIVERED UNASSEMBLED

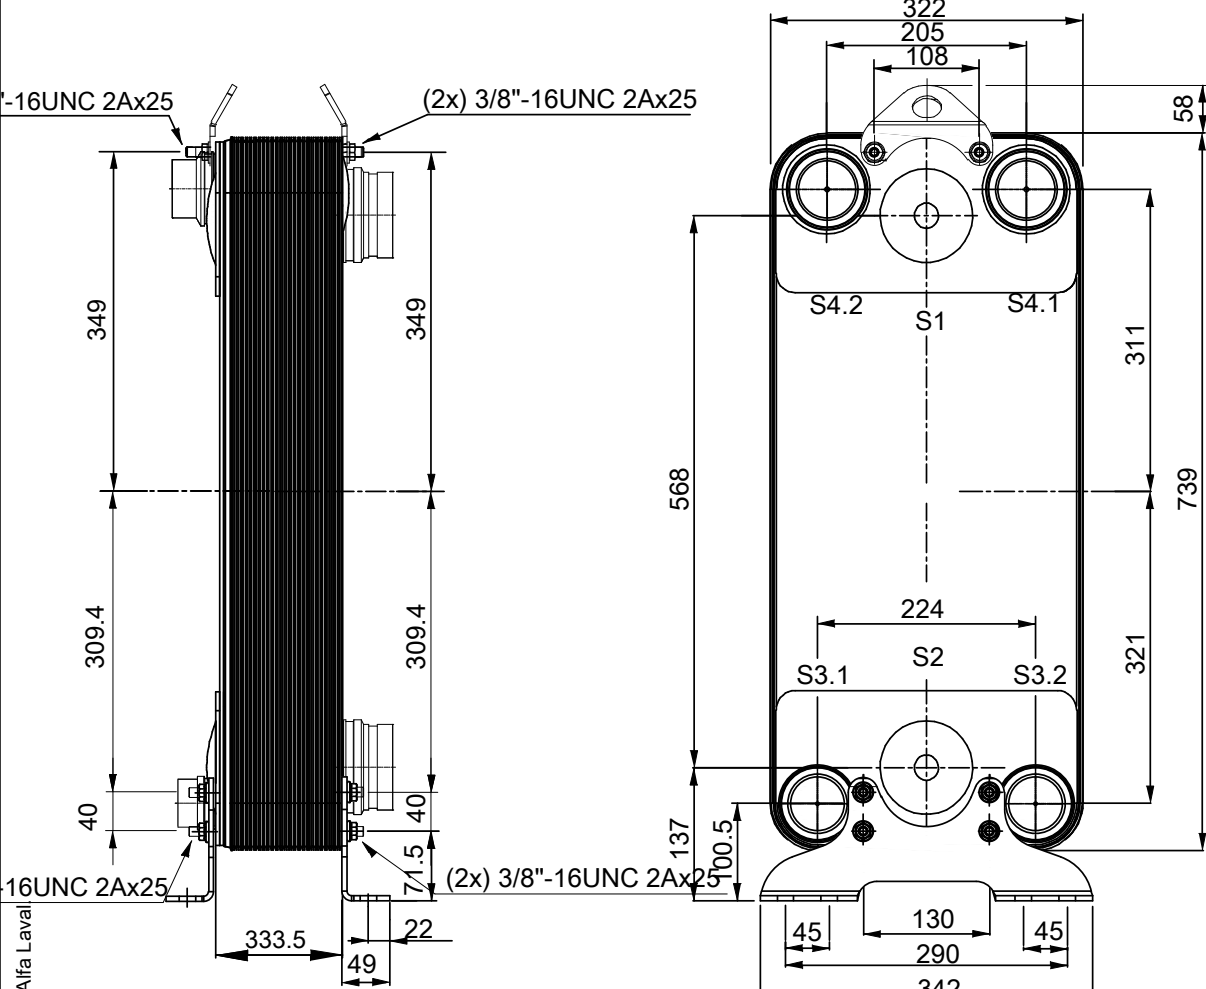

FEET ARE DELIVERED UNASSEMBLED

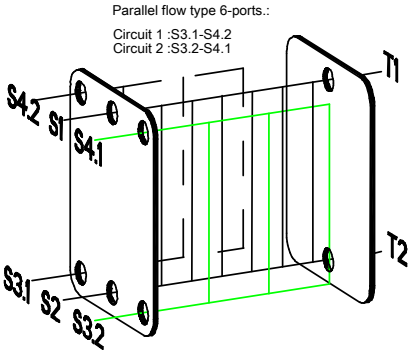

Parallel flow type 6-ports.:  
Circuit 1 :S3.1-S4.2  
Circuit 2 :S3.2-S4.1

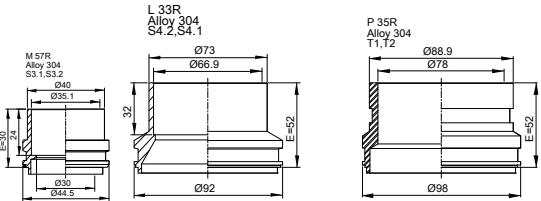

HEATING SURFACE  
NETWEIGHT 127.2 kg  
OPERATING WEIGHT kg  
PLATE MATERIAL ALLOY 316  
PLATE GROUPING 1\*31AHR|1\*31AHR|1\*63AHR

T1 T2 T3.1 T3.2 T4.1 T4.2 locations on back side  
correspond to S1 S2 S3.1 S3.2 S4.1 S4.2 on front side

ALL DIMENSIONS IN MILLIMETERS

| SIDE | MEDIA | INLET      | TEMP. | OUTLET     | TEMP. | FLOW RATE | PRESSURE DROP | LIQUID VOL.               |
|------|-------|------------|-------|------------|-------|-----------|---------------|---------------------------|
| 1    |       | T1         |       | T2         |       |           |               | 32.8 dm <sup>3</sup>      |
| 2    |       | S3.1, S3.2 |       | S4.2, S4.1 |       |           |               | 13.9/13.9 dm <sup>3</sup> |



PRESSURE VESSEL APPROVAL  
UL/CRN  
ACH502DQ-126AH-F (3075015517)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.

TOTAL LENGTH 436.0 mm  
TOTAL WIDTH 322.0 mm  
TOTAL HEIGHT 838.0 mm

4/16/2024  
REV 0