
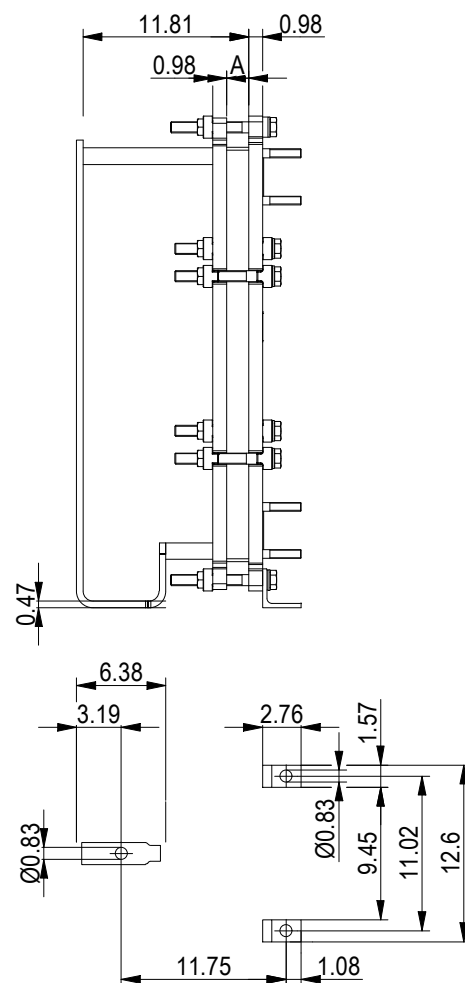





Space between pressure plate and supporting column should be kept free from fixed installations!

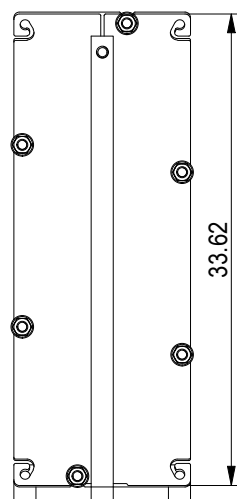


*) Recommended free space for opening and closing to be applied on both sides

Free space can be reduced to this distance on one of the sides


All dimensions in inches

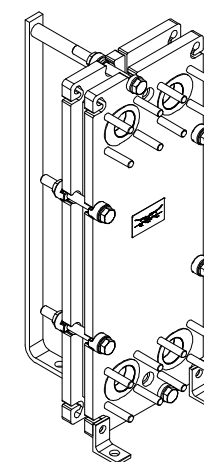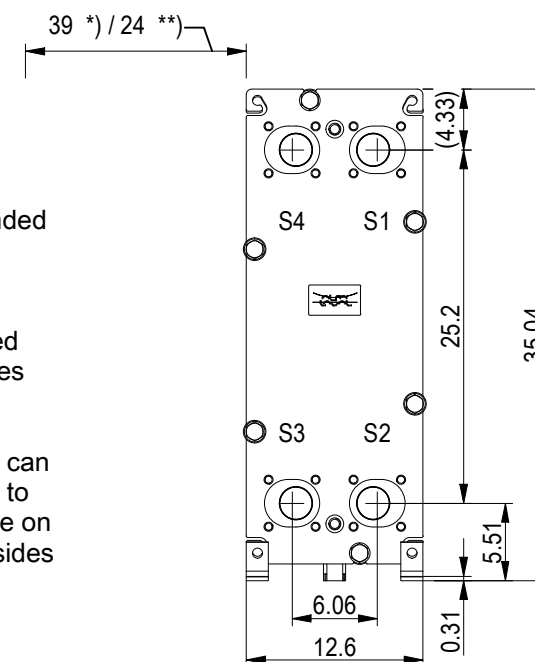

PROTECTION SHEET





PRESSURE PLATE



FRAME PLATE

ASME B16.5 Class 150 NPS 2
S1, S2, S3, S4

A-A:
ALLOY 316

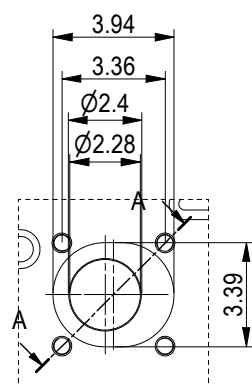

5/8"-11 UNC (x4)

NO. OF UNITS

1

10.0 GPM
9.9 GPM



www.alfalaval.com


DRAWING

GASKETED PLATE HEAT EXCHANGER

T6-BFG

ASME
Code Section VIII Div.1

MAWP 150 psi at 266.0 °F
MDMT -18.0 °F at 150 psi
Designed, constructed and stamped in accordance with 2021 ASME.



8240152974
T6-BFG, 30 plates

Do not use this drawing for foundation bolting or piping layout or planning of lifting and handling of the equipment.

DATE 6/13/23
REVISION 0

TIGHTENING BOLTS 4 x M20, L = 13.0 in
 2 x M20, L = 13.0 in

APPROX. OUTER DIMENSIONS

LENGTH 19.7 in

WIDTH 13.0 in

HEIGHT 34.6 in

APPROX. WEIGHTS

NET WEIGHT, EMPTY 353 lb

WEIGHT FULL OF WATER 370 lb

WEIGHT/USE OF WATER	370 IS
PLATE MATERIAL	ALLOY 316

PLATE THICKNESS	0.5 mm
-----------------	--------

GASKET NBRP ClipGrip™

AREA OF HEAT SURFACE 45.2 ft²