

Alfa Laval LKVF Coarse Strainer

Filters and strainers

Introduction

The Alfa Laval LKVF Coarse Strainer is a type of filter used to remove coarse particles from liquids from 1 to 3 mm.

Application

The Alfa Laval LKVF Coarse Strainer is designed to remove coarse particles from the liquid flow to protect pumps or other sensitive equipment from damage. It is used on a wide range of applications across the dairy, food, beverage and brewery industries.

Benefits

- Safeguards membrane filtration, pumps and other equipment from damage
- Easy to install and clean
- High durability
- Flexible filter element selection

Standard design

The LKVF Coarse Strainer consists of a housing with inlet and outlet. Inside the housing, the filter element is fixed to allow the flow to be forced through it. This element consists of a perforated tube which is welded to a flange with a handle. This flange fits a ferrule on the casing to which it is clamped.

Working principle

The recommended flow direction is to allow the liquid to enter the inlet (A). The particles strained collect inside the filter element which facilitates cleaning, especially if the handle points downwards or if the strainer is installed in a horizontal position. The liquid leaves the strainer through the side outlet (B).

However, it is possible to allow the liquid to enter the inlet (B) since the perforated tube is designed to withstand the pressure drop in both flow directions. The liquid leaves the strainer through the outlet (A). If side connection (B) is used as the inlet, then the maximum product pressure is 7 bar.



TECHNICAL DATA

Pressure

| | |
|----------------------------------|-------------------|
| Max. product pressure (A=inlet): | 1000 kPa (10 bar) |
| Max. product pressure (B=inlet): | 700 kPa (7 bar) |
| Min. product pressure: | Full vacuum |

Temperature

| | |
|--------------------|-------------------------|
| Temperature range: | -10 °C to 140 °C (EPDM) |
|--------------------|-------------------------|

Strainer area

| | |
|---------------|---------------------|
| 25-38-51 mm: | 430 cm ² |
| 63.5-76.1 mm: | 840 cm ² |

PHYSICAL DATA


Materials

| | |
|-----------------------------|-------------------------------|
| Product wetted steel parts: | Acid-resistant steel AISI 316 |
| Other steel parts: | Stainless steel AISI 304 |
| Seals: | EPDM rubber |
| Surface finish: | Semi bright |
| Material grades | Seal of nitrile (NBR) or PTFE |


Sizes

25 mm, 38 mm, 51 mm, 63.5 mm and 76.1 mm.

Strainer element perforation

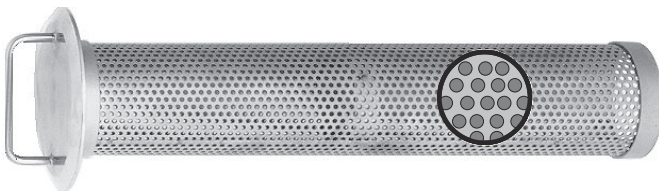

Filter element




| d mm | C mm | Perforation |
|---------|---------|-------------|
| 1 | 2.0 | 23% |
| 2 | 3.5 | 30% |
| 3 | 5.0 | 33% |



Note!

Separate pressure drop/capacity diagrams are available on request.

Dimensions (mm)

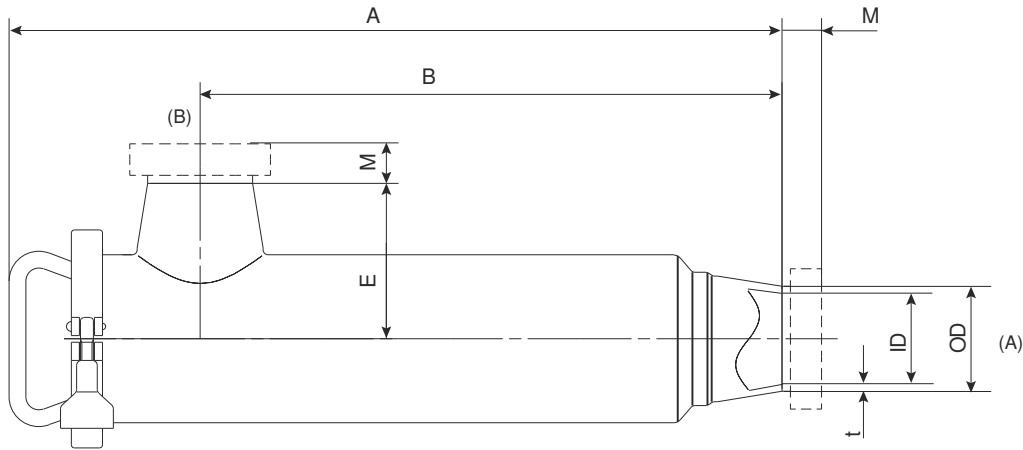

| Size | 25 mm | 38 mm | 51 mm | 63.5 mm | 76.1 mm |
|-------------|-------|-------|-------|---------|---------|
| A | 419 | 375 | 333 | 460 | 421 |
| B | 288 | 244 | 202 | 352 | 313 |
| OD | 25 | 38 | 51 | 63.5 | 76.1 |
| ID | 22.6 | 35.6 | 48.8 | 60.3 | 72.1 |
| t | 1.2 | 1.2 | 1.1 | 1.6 | 2 |
| E | 121 | 77 | 77 | 94 | 94 |
| M/DS male | 18.5 | 20 | 20 | 24 | 24 |
| M/SMS male | 15 | 20 | 20 | 24 | 24 |
| M/ISO male | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 |
| M/BS male | 22 | 22 | 22 | 22 | 22 |
| M/DIN male | 22 | 22 | 22 | 25 | 30 |
| M/ISO clamp | 21.5 | 21.5 | 21.5 | 21.5 | |
| Weight (kg) | 1.5 | 1.5 | 1.5 | 3.7 | 3.7 |

Pressure drop / capacity diagram

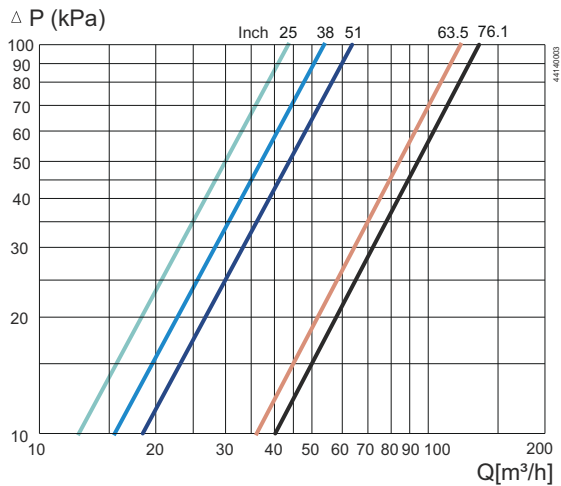


Figure 1. LKVF with $\varnothing 2$ mm holes in filter element. Medium: water (20 °C).

Ordering

Please state the following when ordering:

- Size
- Connections if not welding ends
- Size of holes in straining element, 1, 2 or 3 mm
- Options

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200006199-2-EN-GB

© Alfa Laval Corporate AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com