





Space between pressure plate and supporting column should be kept free from fixed installations!

*) Recommended free space for opening and closing to be applied on both sides

Technical drawing of the front view of a rectangular plate. The plate has a total width of 320 and a total height of 890. The drawing shows four large circular features labeled S1, S2, S3, and S4. S1 and S2 are located in the upper half, while S3 and S4 are in the lower half. There are also four smaller circular features, one in each corner. A central rectangular feature with a wavy line is located between S1 and S3. Dimensions are indicated: a horizontal distance of 140 from the left edge to the center of S1 and S2, and a vertical distance of 140 from the bottom edge to the center of S3 and S4. The distance between the centers of S1 and S2 is 110. The distance between the centers of S3 and S4 is 640. The thickness of the plate is indicated as 8.

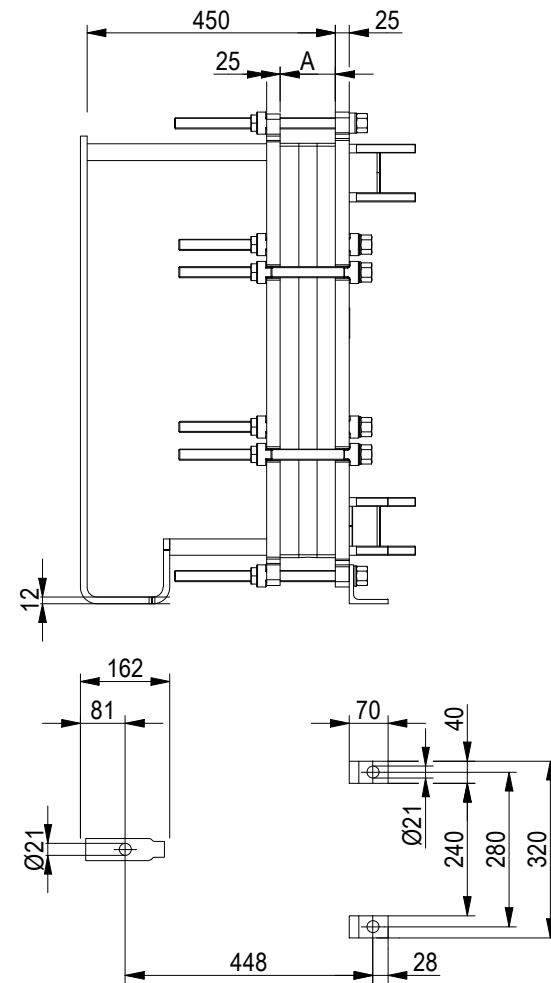

(MOVABLE)

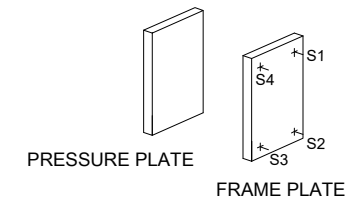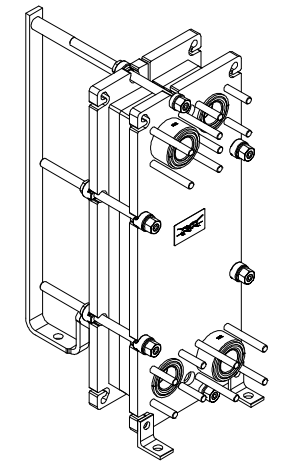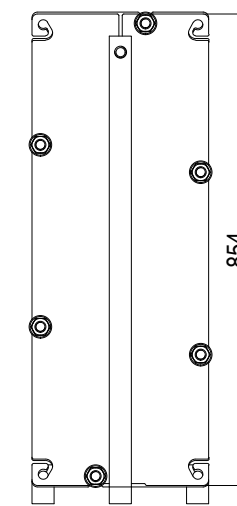

NO. OF UNITS

1

CHANNEL ARRANGEMENT 1*17 H
/ 1*17 H




DRAWING

GASKETED PLATE HEAT EXCHANGER

T6-PFM

PED Article 4.3



8240120991

Do not use this drawing for foundation bolting or piping layout

DATE 2/21/22
REVISION 0