



Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.



H 66
Alloy 304
S3



H 41
Alloy 304
S1,S2,S4



HEATING SURFACE
NETWEIGHT 8.0 kg
OPERATING WEIGHT kg
PLATE MATERIAL ALLOY 316
PLATE GROUPING 1*39H/1*40H

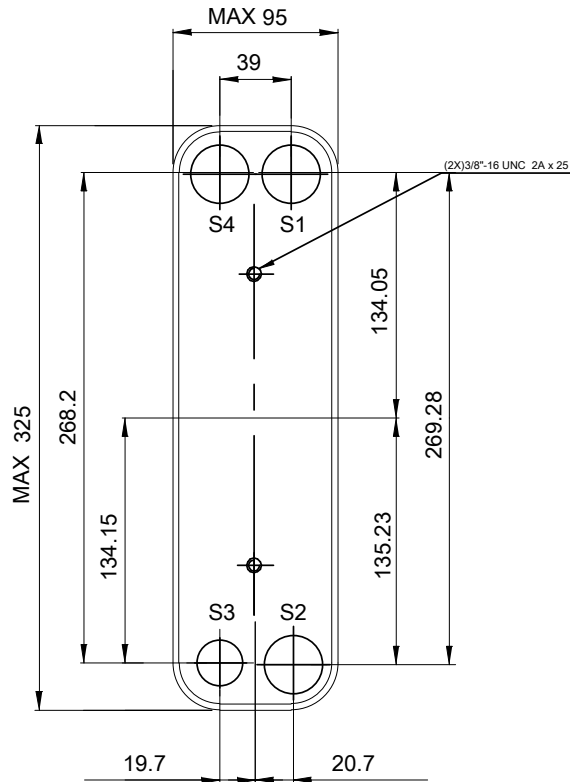

Frameplate is depressed 1.2 mm at connection S4
Pressureplate is depressed 1.2 mm / even number of channel
plates at connections T4 / uneven number of channel plates att
connections T1.
T1 T2 T3 T4 locations on back side
correspond to S1 S2 S3 S4 on front side

ALL DIMENSIONS IN MILLIMETERS

SIDE	MEDIA	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
1		S1		S2				1.12 dm³
2		S3		S4				1.09 dm³

PRESSURE VESSEL APPROVAL

UL/CRN

ACH-30EQ-80H-F (3075028543)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

TOTAL LENGTH 156.6 mm
TOTAL WIDTH 94.0 mm
TOTAL HEIGHT 323.0 mm

COMPANY / REF.

4/16/2024
REV 0