


Space between pressure plate and supporting column should be kept free from fixed installations!

*) Recommended free space for opening and closing to be applied on both sides

Technical drawing of the front view of a rectangular plate. The overall dimensions are 320 mm in width and 890 mm in height. The plate features four large circular features labeled S1, S2, S3, and S4, arranged in a 2x2 grid. S1 and S2 are on the right side, while S3 and S4 are on the left side. The distance between the centers of S1 and S2 is 140 mm, and the distance between the centers of S3 and S4 is 140 mm. The distance between the centers of S1 and S3 is 320 mm. The distance between the centers of S2 and S4 is 320 mm. The distance between the centers of S1 and S2 and the bottom edge is 140 mm. The distance between the centers of S3 and S4 and the bottom edge is 140 mm. The distance between the centers of S1 and S2 and the top edge is 640 mm. The distance between the centers of S3 and S4 and the top edge is 640 mm. The distance between the centers of S1 and S2 and the right edge is 110 mm. The distance between the centers of S3 and S4 and the right edge is 110 mm. The plate has a thickness of 8 mm. A small rectangular feature is located in the center of the plate, between S1 and S3.




Technical drawing of a rectangular frame. The drawing shows a top-down view of a rectangular structure with a central vertical slot. The overall width is labeled as 854 and the overall height as 1000. The frame consists of two main vertical sections connected by a horizontal bar at the top. There are four circular fasteners or bolts: two on the left vertical section and two on the right vertical section. The central slot is defined by two vertical lines, with a small circle at the top center. The drawing is a black and white line drawing with no shading.

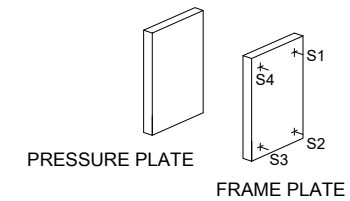

1

/ 1*7 H



2/21/22
0